




**oomaa**  
metal sources

An ISO 9001:2015 Certified Co.

**Lifeline** of the Industrial World

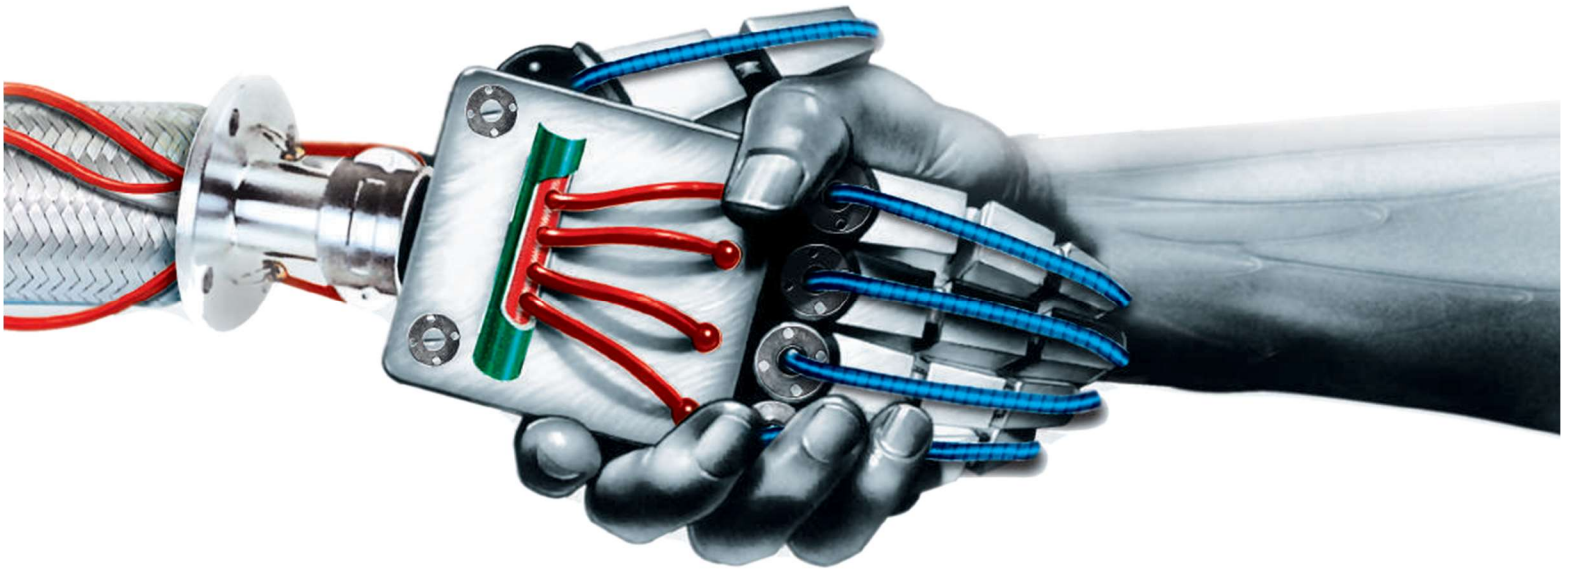

PRODUCT  
CATALOGUE

# INDEX

<b>METALLIC HOSE</b>	
CONVOFLEX STAINLESS STEEL HOSE	1
STAINLESS STEEL HIGH PRESSURE CORRUGATED HOSE	3
CORRUGATED FLEXIBLE EXOTIC METAL HOSE	3
<b>JACKETED HOSE (GJ)</b>	
HEAT AND COOLANT – TRACED HOSE	4
ELECTRICALLY HEATED CONVOLUTED CORE HOSE	5
<b>PTFE HOSE</b>	
PTFE CORRUGATED TRANSFER HOSE (GTC)	6
SMOOTH BORE – MEDIUM PRESSURE PTFE HOSE	7
PTFE LINED HOSE (GTL)	8
ANTI-STATIC PTFE HOSE	8
<b>COMPOSITE HOSE</b>	
COMPOSITE / POLYPROPYLENE HOSE (GC)	9
PTFE LINED COMPOSITE HOSE (GTC)	9
<b>RUBBER HOSE</b>	
STEAM HOSE	10
OIL SUCTION & DISCHARGE HOSE	12
LIQUIFIED PETROLEUM GAS (LPG) HOSE	13
CHEMICAL HOSE	14
PHOSPHORIC ACID SUCTION & DISCHARGE HOSE (GPS)	16
CARBON FREE HOSE (GCF)	16
BREWERY & CREMERY HOSE (GBC)	17
CABLE / FURNACE COOLANT HOSE (GFC)	17
AIR HOSE, PNEUMATIC HOSE, ROCK DRILL HOSE	18
SAND / SHOT BLASTING & CEMENT GROUTING HOSE (GSC)	19
SAND AND GRAVEL HOSE (GSG)	19
WATER SUCTION HOSE	20
HIGH PRESSURE HYDRAULIC HOSE	22
<b>INSTALLING FLEXIBLE METAL HOSE</b>	25
<b>MODES OF MOVEMENT &amp; MOTION - FLEXIBLE HOSE</b>	26
<b>HOSE REELS</b>	27
<b>HOSE SIZE &amp; THREAD SIZE SELECTION CHART</b>	28
<b>END CONNECTIONS</b>	
STANDARD END CONNECTIONS	29
END FITTINGS	30
CAMPLOCK COUPLING (GCC 7060)	31
QUICK RELEASE COUPLING (GQRC)	32
DRY DISCONNECT COUPLING	33
BREAK-AWAY COUPLING	33
OTHER FITTINGS	34
SMS UNION	34
HAMMER UNION	34
<b>EXPANSION JOINTS</b>	
METALLIC	36
RUBBER	36
<b>INSTALLATIONS INSTRUCTIONS</b>	37
<b>CHEMICAL RESISTANCE CHART</b>	38



# METALLIC HOSE

## CONVOFLEX STAINLESS STEEL HOSE



**Specification :** BS 6501 / ISO 10380

**Construction :**

Hose Material	:	304/ 304L / 316 / 316L / 321
Braid Material	:	Standard Braid Material is SS304 Braid also available in SS316.
Tube	:	Heavy wall inner core for corrosive service. Butt welded Annular Corrugations, close - pitch tubing.
Size Range	:	6mm I.D. to 900mm I.D.
Temperature	:	- 200°C to 800°C for AISI 321 & 316 - 200°C to 420°C for AISI 304 & 304L

**Application :**

This hose is suited for any application where working conditions demand one or a combination of any of the following: absolute leak proof, a high safety factor, extreme temperature, vibrations, high working pressure and corrosion resistance.

Applicable for cryogenic and chemical transfer, vacuum, super-heated steam, coolant lines, fuel and oil burner lines, petroleum, refrigerants, gases, poisonous media and food stuff.



# METALLIC HOSE

## Hose Specification Chart

Code	I.D. inches	I.D. mm	O.D. mm	Working Pressure kgf/cm <sup>2</sup>	Test Pressure kgf/cm <sup>2</sup>	Minimum bend radius mm
OMS 6	1/4	6	14	100	150	90
OMS 10	3/8	10	19	90	135	150
OMS 12	1/2	12	22	80	120	200
OMS 20	3/4	20	29	64	96	203
OMS 25	1	25	36	50	75	229
OMS 32	1 1/4	32	45	40	60	267
OMS 38	1 1/2	38	55	30	45	292
OMS 50	2	50	68	28	42	318
OMS 65	2 1/2	65	84	24	36	508
OMS 80	3	80	97	18	27	610
OMS 100	4	100	126	16	24	750
OMS 125	5	125	152	12	18	900
OMS 150	6	150	178	10	15	1050
OMS 200	8	200	225	8	12	1180
OMS 250	10	250	278	6	9	1250
OMS 300	12	300	330	5	7.5	1400

For static pipe work, the bend radius can be reduced considerably.  
For extra high pressure, extra braid can be provided, consult our Technical Department.  
For pressure drop estimates of corrugated metal hose, consult our Technical Department.  
The above pressure ratings are for fluid at ambient temp. of 30°C.

### Temperature :

As the operating temperature of a hose assembly increases, the maximum working pressure of the assembly decreases.

Below is a chart showing temperature correction factors for 'CONVOFLEX' Stainless Steel Metal Hose.

(°C)	Correction Factor	(°C)	Correction Factor
-200 to 50	1.00	400	0.67
100	0.94	450	0.64
150	0.88	500	0.61
200	0.84	550	0.60
250	0.79	600	0.58
300	0.76	700	0.56
350	0.71	800	0.54

### How to use Temperature Correction Factor Chart ?

1. Determine the maximum operating temperature of the application.
2. Locate this temperature on the chart and read across the proper factor.
3. Multiply this factor times the maximum working pressure as determined from the Hose Specification Chart.
4. This answer is your maximum Safe Working Pressure at that Elevated Temperature.



# METALLIC HOSE

## STAINLESS STEEL HIGH PRESSURE CORRUGATED HOSE

### Construction :

Hose Material : SS 316 Tube (Butt Welded) Annular Close Pitch Corrugations

Braid Material : SS 304

		Pressure (psig) at Ambient Temperature			Minimum Center-Line Bend Radius		
Nominal Hose I.D. (inches)		Maximum Working (MWP)	Maximum Working (MTP)	Rated Burst (RBP)	Dynamic Flexing (Inches)	Static Bend (Inches)	Minimum Live Length of Normal Bend (Inches)
1/4	Double Wire Braid	5320	5320	21280	5	1	3 1/2
3/8		3925	3925	15700	5 1/2	1 1/8	4 1/4
1/2		3680	3680	14480	7 1/2	1 1/2	4 1/2
3/4		3555	3555	14220	8 1/2	2 3/4	5 1/4
1		2810	2810	11240	10	2 3/4	7
1 1/4		2500	2500	10000	11 1/2	3 3/4	7 1/4
1 1/2		2220	2220	8880	13	5	8
2		1680	1680	6720	15	6 3/4	9 1/2
3	Triple Wire Braid	1475	1475	5900	21	9	11
4		1225	1225	4900	27	11 1/2	12
5		1200	1200	4800	32	14	13
6		950	950	3800	37	17	14
8		875	875	3500	46	22	16
10		750	750	3000	56	26	18
12		525	525	2100	62	32	20

## STAINLESS STEEL BIG BORE HOSE

Hose Material : SS 321 Butt Welded Tube Annular Close Pitch Corrugations

Braid Material : SS 304, SS316L & SS321

I.D. Inches	I.D. mm	O.D. mm	Working Pressure Kgf/cm <sup>2</sup>	Test Pressure Kgf/cm <sup>2</sup>	Min.bend radius mm
14	350	371	11	16	1676
16	400	422	8	12	1880
18	450	483	6	9	2083
20	500	533	5	7.5	2286
22	550	584	3.5	5.25	2489
24	600	635	3	4.5	2642
30	750	788	1.5	2.25	3251

## CORRUGATED FLEXIBLE EXOTIC METAL HOSE

### Construction :

Hose Material : Monel, Bronze,  
Braid Material : Monel, Bronze SS 304, SS 316.  
Size Range : From 1/4 to 4 inches  
Temperature : Monel up to 427° C.  
Bronze up to 204° C.

### Application :

Monel : Excellent Chemical Resistance to Dry Chlorine, Salt  
Water & Alkalies, Meets Requirements of Chlorine  
Institute.  
Bronze : Designed to maintain pipeline material integrity &  
prevent galvanic corrosions.

**Note :** Hose available upon request in metals such as Hastelloy Titanium, Inconel 600 & 625  
For Further Information please contact our technical department.

### Advantages of Flexible Metallic Hose :

1. High physical strength.
2. Suitable for elevated temperature (800°C).
3. Fire resistant.
4. Good corrosion characteristics.
5. Long life
6. Resistance to penetration & damage.



# JACKETED HOSE (GJ)

## HEAT AND COOLANT – TRACED HOSE

### Material and Design :

For the Internal hose and Jacketed hose, our stainless steel corrugated hose is used with stainless steel braiding.

#### Core & Jacket


SS304/304L/316/316L/321

#### Braid Material

SS304/304L/316/316L

#### Operating Temperature

400°C max. (600° C is possible as a special design).

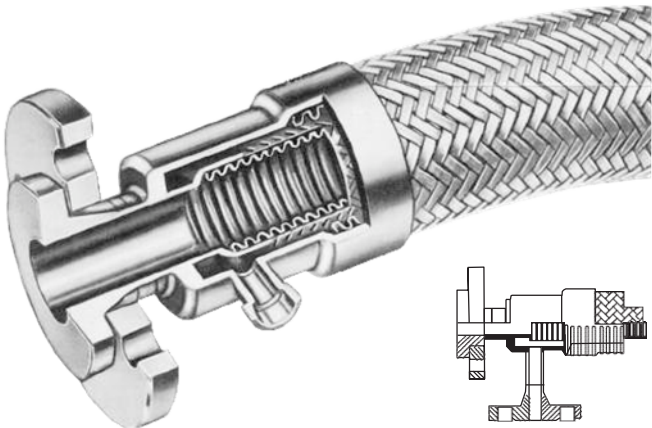

### Application :

When ordinary insulation is not sufficient for certain applications or when specific minimum temperatures are needed to convey viscous substances, traced piping is generally used; this consists of two tubes, one inside the other, with various differences in cross-section.

One of the tubes, generally the inner one, carries the medium, and the other one carries a heating or cooling agent; sometimes it is the other way around. In other cases, the external tube is used as a safety measure.

Occasionally, such traced piping has to be flexible; for such applications we supply our Jacketed hose.

Its high flexibility makes this hose very suitable for angular and lateral (offset) movement. The Jacketed hose is pressure and vacuum proof due to the materials used for its manufacturing. It is resistant to temperature and corrosion. The large surface area of the corrugated section results in particularly high heat transfer efficiency, the hose combining the functions of a flexible conduit and a highly efficient heat exchanger in the simplest possible form.

The JAKCETED Hose is suitable for many different purposes.

As a heat-able element the hose is mainly used in the chemical, pharmaceutical, oil and civil engineering machinery industries to convey viscous or temperature – sensitive media, such as

### Hose Specification :

Core (Internal Hose)	Jacket Tracer Conduit	Threaded Connection (Pipe Thread) inches
10	25	$\frac{3}{8}$
16	32	$\frac{3}{8}$
20	40	$\frac{1}{2}$
25	50	$\frac{1}{2}$
32	50	$\frac{1}{2}$
40	65	$\frac{1}{2}$
50	80	$\frac{3}{4}$
65	100	$\frac{3}{4}$
80	125	$\frac{3}{4}$
100	150	$\frac{3}{4}$
125	175	1
150	200	1
200	250	1

Bitumen	Polyester	Paraffin	Heavy fuel oil	Dimethyl terephthalate (DMT)
Fats	Mercury	Tar	Naphthalene	Synthetic resin
Naphthol	Sulphur	Chlorophenol	Explosive (TNT)	Organic liquefied materials
Phenol	Fatty acids	Chocolate	Thermosetting Plastic	Phthalic acid, waxes and others

The heating agents used are hot water, steam, heat transfer oils or other heat transfer agents.

For cooling, water is the most common agent.

### End Connection :

As a connection for the heating or cooling medium, one weld-neck flange or union is provided at each hose end of the tracer conduit, the two connections being offset by 180° in relation to one another.





## JACKETED HOSE (GJ)

### ELECTRICALLY HEATED CONVOLUTED CORE HOSE

Fluoropolymer Core ( to 204° C)

Stainless Steel Core Hose (to 329° C)

Electrically Heated Convoluted Core Hose products are custom engineered to your specific application requirements and equipment.

Hydraulically and electrically complete, each hose is designed for fast, easy installation. Cores (convoluted fluoropolymer and stainless steel) are designed to meet all requirements while offering improved flexibility on large diameter and bulk transfer products. Hoses can be operated in continuous movement conditions.

The heating element is a nickel alloy wire that is spiral wound to extremely close tolerances providing optimum temperature uniformity throughout the heated length.

#### Applications for this product include :

Product transfer (hot melt adhesives, urethanes, oils, fats. chemicals and wax) Viscosity control (asphalt, tar, fats, oil, wax, chemicals)

#### Features of this product include:

- Ready to use
- Constant power density and self-limiting heating elements
- Reinforced with stainless steel braid
- Electrical insulation is:
  - Fiberglass reinforced, silicone rubber insulation
  - Fiberglass/polyamide film
- $\frac{3}{4}$ " reinforced fiberglass thermal insulation
- External jacket is an abrasion resistant braided polyester sleeve (indoor) or a tough, extruded flame-retardant polyurethane (outdoor use).
- Power/control cable standard length is six (6) feet. Longer lengths are available.



# PTFE HOSE

## PTFE CORRUGATED TRANSFER HOSE (GTC)

### Construction:

Inner core of corrugated PTFE, externally reinforced with stainless steel wire braid.

### Temperature :

(- 54° C) to 204° C



### Specification :

Code	I.D. inches	I.D. mm	O.D. mm	Operating Pressure psi at Room Temp.	Min. bend radius mm
OM 8	1/2	12.7	20.0	1000	25.4
OM 12	3/4	19.05	27.7	1000	50.8
OM 16	1	25.4	33.0	1000	76.2
OM 20	1 1/4	31.75	39.6	1000	158.8
OM 24	1 1/2	38.1	45.5	750	190.5
OM 32	2	50.8	59.2	500	266.7
OM 48	3	76.2	93.5	250	393.7
OM 64	4	101.6	123.2	150	622.3

### Application :

Corrugated transfer hose, is the most broadly applied general - purpose work hose found in hundreds of chemical transfer and food handling situations. Its present applications are as diverse as water purification systems, mercury transfer lines, and food processing equipment.

It has unusually high resistance to thermal cycling; therefore, is used extensively in tire presses, laundry presses and other types of steam service where on-off operating cycles cause wide temperature fluctuations inside the hose.

Corrugated transfer hose is extraordinarily versatile hose, combining excellent flexibility with large size in both length and I.D. (See Specification Table). Present users' rate this as the ideal bulk transfer hose for a wide range of caustics, chemicals and raw materials. Their applications include tank car and ship off loading, bulk handling, chemical and petrochemical transfer, pump connections and many others. This hose can also be used as a suction hose for unloading or transfer at negative pressure.






## SMOOTH BORE – MEDIUM PRESSURE PTFE HOSE

### Construction :

Smooth inner core of extruded white PTFE, with Stainless Steel wire braid reinforcement.

### Temperature :

(-54°C) to 232°C (-65°F to 450°F) for continuous service.  
 (-73°C) to 260°C (-100°F to 500°F) for intermittent service.

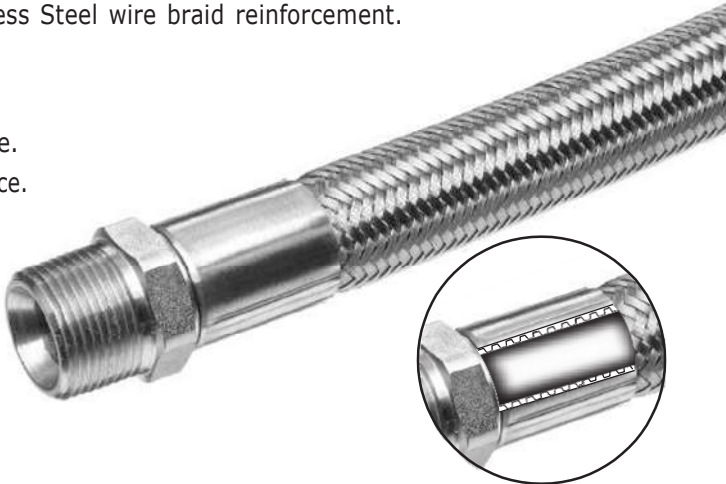

### Specification :

Code	I.D. inches	I.D. mm	O.D. mm	Operating Pressure psi at Room Temp.	Min. bend radius mm
OMPT 3	<sup>3</sup> / <sub>16</sub>	4.76	7.70	3000	50.8
OMPT 4	<sup>1</sup> / <sub>4</sub>	6.35	9.10	3000	50.8
OMPT 5	<sup>5</sup> / <sub>16</sub>	7.93	10.50	3000	76.2
OMPT 6	<sup>3</sup> / <sub>8</sub>	9.52	12.00	2500	101.6
OMPT 8	<sup>1</sup> / <sub>2</sub>	12.70	15.20	2000	132.1
OMPT 10	<sup>5</sup> / <sub>8</sub>	15.87	18.70	1500	165.1
OMPT 12	<sup>3</sup> / <sub>4</sub>	19.05	22.10	1200	195.6
OMPT 16	1	25.04	28.20	1000	228.6

### Advantages of PTFE For Flexible Hose


PTFE is an ideal material for flexible hose, to which a wire over-braid is added for excellent pressure ratings. Such hose gives extremely long life because its inner core has out-standing resistance to steam, chemicals, solvents, heat pressure impulses, flexing, vibration and aging.

- Flexible** : PTFE hose will stand up under severe conditions of continuous flexing and vibration without failure from flex fatigue.
- Chemical resistant** : Inert PTFE creates a nearly “Universal” hose, capable of handling the broadest range of applications except the molten alkali metals such as sodium and potassium and fluorochemicals such as chlorine trifluoride, oxygen difluoride and fluorine gas.
- Temperature resistant** : Even handles 180°C steam alternating with cold water.
- Non-stick** : Hose is easily cleaned, to maintain batch purity when using one hose for several services.
- Low friction** : Hose exhibits low pressure drop, which remains constant because no deposits accumulate on inside walls.
- Moisture resistant** : Ideal for pneumatic systems requiring low dew point.
- Non-aging** : Properties of hose do not change with age or exposure to weather.
- End connection** : Swaged, Crimped or Reusable type.



## PTFE HOSE

### PTFE LINED HOSE (GTL)

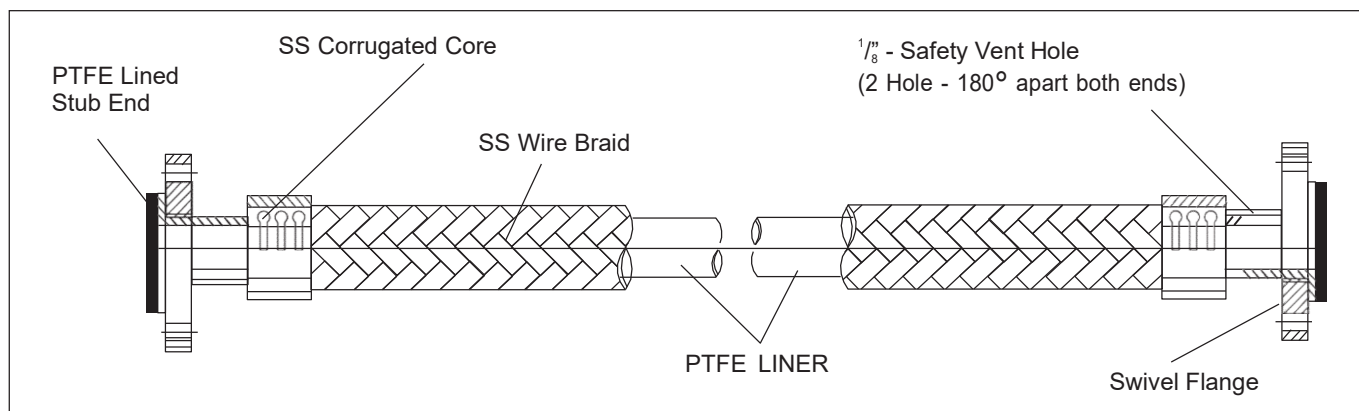

#### All Wetted Parts Are PTFE

OMAA PTFE lined hose has the internal tube of PTFE inside the corrugated metallic hose.

The flange is assembled with the internal tube providing a liner inside and across the face of the flange. Chemical inertness is therefore maintained throughout the entire assembly.

OMAA PTFE lined hose assemblies permit full utilization of the wide operating extreme characteristics of PTFE and are rated for continuous service from (-70°C) to 240°C. These ratings can be exceeded for intermittent operations, depending on time and overall conditions.

### ANTI-STATIC PTFE HOSE

#### Purpose :

Anti Static PTFE Hose is an essential requirement in applications where there is the risk of an electrostatic build up on the inside of the PTFE tube which may then discharge through the tube wall. Media passing through which create such a risk are fluids which have a Conductance of less than 10<sup>-7</sup> S/m (Siemens per Meter), such as fuels, solvents, Freon's, and non polar organics which are being transferred at a medium to high flow velocity.

All twin or multi phase media, and any non-mixing, such as powder in air, or water droplets in steam, in gases or in oil, also colloidal fluids constitute a particular hazard for static charge generation, and always require grade AS.

If in any doubt, please contact our technical department.

#### Design :

AS grade has an anti static PTFE liner manufactured from FDA approved PTFE, and less than 2.5% of "high purity" Carbon Black material to FDA requirement 21 CFR 178.3297. The carbon is encapsulated by the PTFE and in normal, non abrasive applications will not come loose to contaminate any fluid passing through.

#### Specification :

When "AS" (Antistatic) grade hose is specified, then the hose supplied will be in accordance with the requirements of BS5958 Part 2, 1991 Clause 19.3, when tested in accordance with EN ISO 8031 Clause 3.1, which requires that the resistance between a plug inserted 25mm into the bore at the end of the hose assembly, and one of the metallic end fittings should be less than 10 ohms.

**NOTE :** When in service, at least one end fitting must be connected to earth to permit dissipation of the static charge from the end fitting.



# COMPOSITE HOSE

## COMPOSITE / POLYPROPYLENE HOSE (GC)

### FLEXIBLE, LIGHT WEIGHT, COMPOSITE HOSE

- Application** : Composite Hose can handle very wide range of Acids, Chemicals, Petroleum and Refined Oil Products, liquid cargo transfer from barge or ship.
- Construction** : Composite hoses are constructed from polypropylene, polyamide or polyester films & fabrics. Depending on the applications, outer cover could be of PVC coated polyester fabric, which is abrasive, weather & ozone resistant with galvanized steel, polypropylene coated steel & stainless steel 316 internal and galvanized steel, stainless steel external wire.
- Temperature** : (-40°C) to 100°C.
- Specification** : EN 13765 : 2010
- Size** : 1" to 12"
- End Connection** : All types of connections duly crimped as per customer requirement.

## PTFE LINED COMPOSITE HOSE (GTC)

- Application** : Corrosive Chemicals / Alkalies.
- Construction** : Same as Composite Hose – Inside Layer shall be PTFE lined.
- Temperature** : (-40°C) to 120°C. [Hoses upto 316°C can be offered]
- Size** : 1" to 12"
- End Connection** : As per customers requirement duly crimped.

For further Information please contact / consult our technical department.



PRESSURE ( COMPOSITE / POLYPROPYLENE / PTFE LINED COMPOSITE HOSE )				
	Type 1	Type 2	Type 3	Type 4
Maximum working pressure (bar)	4	10	14	14
Proof pressure (bar)	6	15	21	21
Minimum burst pressure (bar)	16	40	56	56
Vacuum rating (bar)	0.5	0.9	0.9	0.9
Working temperature range (°C)	-20° to +60°	-30° to +80°	-30° to +80°	-30° to +150°



# RUBBER HOSE

## STEAM HOSE

### Specification :


As per BS 5122 & IS 10655/ 83.  
This hose can be supplied also as per BS 796 or BS 924 Type M.

### Temperature Of Saturated Steam.

Ibf/in <sup>2</sup>	Gauge Pressure			Temperature	
	kgf/cm <sup>2</sup>	Atm	Bar	°C	°F
25	1.76	1.70	1.73	130	267
30	2.11	2.04	2.07	134	274
35	2.46	2.38	2.42	138	281
40	2.81	2.72	2.76	141	287
45	3.16	3.06	3.11	144	292
50	3.52	3.40	3.45	148	298
60	4.22	4.08	4.14	153	307
70	4.92	4.76	4.83	158	316
80	5.62	5.44	5.52	162	324
90	6.32	6.12	6.21	166	330
100	7.03	6.80	6.90	170	338

Ibf/in <sup>2</sup>	Gauge Pressure			Temperature	
	kgf/cm <sup>2</sup>	Atm	Bar	°C	°F
120	8.44	8.16	8.28	177	350
140	9.84	9.52	9.66	182	361
160	11.25	10.88	11.04	188	371
180	12.65	12.24	12.42	193	379
200	14.06	13.60	13.80	198	388
225	15.82	15.30	15.53	203	397
250	17.58	17.00	17.25	208	406
275	19.33	18.70	18.98	212	414
300	21.09	20.40	20.70	216	422
325	22.85	22.10	22.43	221	429
350	24.61	23.80	24.15	225	437

## LOW TEMPERATURE STEAM HOSE (TYPE M)

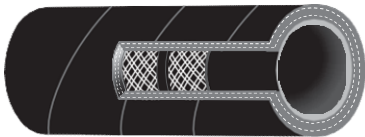

### Construction :

- Tube : Heat resistant lining.
- Reinforcement : Suitable textile reinforcement
- Cover : Heat & Abrasion resistant.
- Temperature Range : (-30°C) to 150°C
- Steam Pressure : 5.2 kgf/cm<sup>2</sup>
- Hydraulic Test Pressure : 25 kgf/cm<sup>2</sup>
- Burst Pressure : 50 kgf/cm<sup>2</sup>
- End connection : Swaged, Crimped or Reusable type.

I. D. inches	I. D. mm	O. D. mm	Min. bend radius mm
<sup>1</sup> / <sub>2</sub>	12.7	25	120
<sup>5</sup> / <sub>8</sub>	15.9	28	160
<sup>3</sup> / <sub>4</sub>	19.0	32	190
1	25.4	40	250
1 <sup>1</sup> / <sub>4</sub>	31.8	48	320
1 <sup>1</sup> / <sub>2</sub>	38.1	54	380
2	50.8	65	500
2 <sup>1</sup> / <sub>2</sub>	63.0	83	630
2 <sup>3</sup> / <sub>4</sub>	70.0	90	700

### Electrical Continuity:

It can be supplied on a special request.



# RUBBER HOSE

## HIGH TEMPERATURE STEAM HOSE – TYPE I (SINGLE WIRE)



### Single wire braided

- Tube : Made of heat resistant synthetic rubber
- Reinforcement : One Braid of HTS Wire.
- Cover : Synthetic rubber cover, oil, weather & abrasion resistant.
- Temperature : Upto 200°C
- Steam Pressure : 150 psi or 10 kgf/cm².
- Electrical Continuity : Yes
- End connection : Swaged, crimped or Reusable type.

I. D. inches	I. D. mm	O. D. mm	Min. bend radius mm
$\frac{3}{16}$	4.8	12.8	90
$\frac{1}{4}$	6.4	15.0	100
$\frac{5}{16}$	7.9	17.1	115
$\frac{3}{8}$	9.5	20.0	125
$\frac{1}{2}$	12.7	24.7	180
$\frac{5}{8}$	15.9	27.9	200
$\frac{3}{4}$	19.0	31.4	240
1	25.4	38.0	380
$1\frac{1}{4}$	31.8	47.2	420
$1\frac{1}{2}$	38.1	53.5	510
2	50.8	66.8	635

## HIGH TEMPERATURE STEAM HOSE – TYPE II (DOUBLE WIRE)



### Double wire braided

- Tube : Made of heat resistant synthetic rubber.
- Reinforcement : Two Braid of HTS Wire.
- Cover : Synthetic rubber cover, oil, weather & abrasion resistant.
- Temperature : Upto 200°C
- Steam Pressure : 200 psi
- Electrical Continuity : Yes
- End connection : Swaged, crimped or Reusable type.


I. D. inches	I. D. mm	O. D. mm	Min. bend radius mm
$\frac{3}{16}$	4.8	14.8	90
$\frac{1}{4}$	6.4	17.0	100
$\frac{5}{16}$	7.9	19.1	115
$\frac{3}{8}$	9.5	22.0	125
$\frac{1}{2}$	12.7	26.7	180
$\frac{5}{8}$	15.9	29.9	200
$\frac{3}{4}$	19.0	33.4	240
1	25.4	40.0	380
$1\frac{1}{4}$	31.8	50.0	420
$1\frac{1}{2}$	38.1	56.7	510
2	50.8	70.0	635



# RUBBER HOSE

## OIL SUCTION & DISCHARGE HOSE

### LIGHT DUTY (ROAD AND RAIL TANKER HOSE)

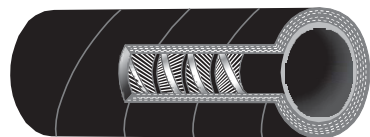

**Specification** : BS 3492/ IS 10733

- Construction** :
- Lining : Resistant to petroleum liquids.
  - Reinforcement : Cotton textile or synthetic material with G.I. embedded wire.
  - Cover : Resistant to weather abrasion and petroleum products.
  - Electrical continuity : By providing anti-static copper wire.
  - End connection** : Normally flanged type or threaded nipple i.e. built in type / vulcanize / crimped / swaged.
  - Couplings : As per BS 2464 or Lug type or Camlock type Male or Female as per requirement.

I. D. mm	Working pressure 1A & 1B kgf/cm <sup>2</sup>	Min. bend radius 1A & 1B mm	Working pressure 2A & 2B kgf/cm <sup>2</sup>	Min. bend radius 2A & 2B mm
32	3.5	130	7.0	190
38	3.5	150	7.0	230
50	3.5	200	7.0	310
63	3.5	260	7.0	380
76	3.5	310	7.0	460
100	3.5	410	7.0	560

**Application** : Discharging of petrol and diesel oil from tank truck & between tank, trucks & trailers.  
Suitable for pressure, vacuum and self discharge. Very low deformation when used for petrol.

### Different types of construction in BS 3492

**Type 1A :**  
Rough bore, light weight, maximum flexibility with internal and external wire reinforcement and corrugated outer cover.  
Working pressure : 3.5 kgf/cm<sup>2</sup>  
Bursting pressure : 14.0 kgf/cm<sup>2</sup>  
Test pressure : 7.0 kgf/cm<sup>2</sup>

**Type 2A :**  
Rough bore, medium weight, maximum flexibility with internal and external wire reinforcement and corrugated outer cover.  
Working pressure : 7.0 kgf/cm<sup>2</sup>  
Bursting pressure : 28.0 kgf/cm<sup>2</sup>  
Test pressure : 14.0 kgf/cm<sup>2</sup>

**Type 1B :**  
Smooth bore, light weight and maximum flexibility with fully embedded wire reinforcement and smooth or corrugated outer cover.  
Working pressure : 3.5 kgf/cm<sup>2</sup>  
Bursting pressure : 14.0 kgf/cm<sup>2</sup>  
Test pressure : 7.0 kgf/cm<sup>2</sup>


**Type 2B :**  
Smooth bore, medium weight and maximum flexibility with fully embedded wire reinforcement and smooth or corrugated outer cover.  
Working pressure : 7.0 kgf/cm<sup>2</sup>  
Bursting pressure : 28.0 kgf/cm<sup>2</sup>  
Test pressure : 14.0 kgf/cm<sup>2</sup>





# RUBBER HOSE

## HEAVY DUTY (OIL CARGO HOSE)

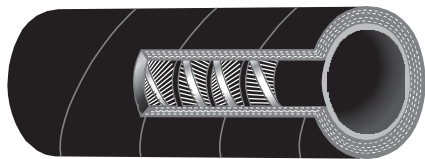

<b>Specification</b>	: BS 1435 or IS 8189		
<b>Construction</b>	:		
Tube	: Lining Resistant to petroleum products.		
Reinforcement	: Multiple plies of textile fabric with GI embedded wire.		
Cover	: Oil, weather & abrasion resistant.		
	<b>Working Pressure</b>	<b>Test Pressure</b>	
S. 7 - 0.7 mpa	100 psi	150 psi.	
S. 10 - 1.0 mpa	150 psi	225 psi	
S. 15 - 1.5 mpa	220 psi	310 psi.	

I. D. inches	I. D. mm	Min. bend radius mm
2 1/2	63	520
3	76	600
4	102	800
6	152	1200
8	204	1600
10	254	2290
12	305	3050


There are two types 1. Smooth Bore  
2. Rough Bore.

**Application :**  
Loading and discharging of petroleum products on ship with an aromatic content.  
Features : Integrally embedded spiral designed for pressure or vacuum.

Above hose is suitable for petroleum and all other petroleum products with an aromatic content less than 50%.  
For Electrical continuity a braided copper wire is provided.

**End Connection :**  
Flanged type or threaded nipple duly vulcanized in hose or as per purchaser's requirement.

## LIQUIFIED PETROLEUM GAS (LPG) HOSE



<b>Specification</b>	: IS 9573 / 1980 or BS 4089, BS EN 1762 : 2003.		
<b>Construction</b>	:		
Lining	: Suitable rubber compound resistant to liquified petroleum gas.		
Reinforcement	: The reinforcement shall be of woven textile fabric or braided textile yarn, natural or synthetic or combination of both or braided with HTS wire.		
Cover	: The cover shall be of rubber compound resistant to abrasion, weather, ozone and petroleum fuel.		
Sizes	: The hoses are available from 8 mm to 75 mm.		
<b>End Connection</b>	: Flanged or threaded type.		

**Application :**  
This hose is suitable for use in LPG vapour phase and LPG/Air installations. This hose can also be put to wet use i.e., permanently filled with liquid and in the temperature range from 0°C to 40°C.

Test	: Internal Hydraulic Burst Pressure 100 Kg/cm <sup>2</sup>
Electrical Continuity	: Can be provided on a special request.



# RUBBER HOSE

## CHEMICAL HOSE


### SUCTION AND DISCHARGE HOSE (GCS)

Specification : IS 7654 / 1975

**Types :**


**Type I**

Conveying diluted chemicals



**Type II**

Conveying concentrated chemicals.

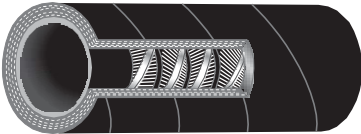

**Construction :**

Tube : Natural Rubber.  
Reinforcement: Multiple plies rubber impregnated strong woven fabric with helical steel wire, full-vacuum and discharge pressure, that vary according to size. Flexible construction keeps hose round when bent, reducing kinking and damaging.  
Cover : Black outer rubber cover resists abrasion, sunlight and weather.

Tube : Hypalon  
Reinforcement: Multiple plies rubber impregnated strong woven fabric with helical steel wire, full-vacuum and discharge pressure, that vary according to size. Flexible construction keeps hose round when bent, reducing kinking and damaging.  
Cover : Hypalon resists abrasion, sunlight and weather.

**Application :**

For suction and discharge service handling many inorganic acids, except strong oxidizing agent. Withstands most salts and alkalies.

**End Connection :** Couplings must be selected for corrosion and pressure.

For special application, alternate construction can be supplied.  
Tube : Nitrile, Neoprene, Butyl, SBR, EPDM, Thiokol.  
Cover : Nitrile, Neoprene, Butyl, SBR, EPDM, Thiokol.

I.D. inches	I.D. mm	No. of plies	Working Pressure psi	Min. bend radius mm
3/4	20	4	150	160
1	25	4	150	200
1 1/4	32	4	150	250
1 1/8	35	4	150	280
1 1/2	38	4	100	300
1 3/4	45	4	100	360
2	50	4	100	400
2 1/2	63	4	100	500
2 3/4	70	4	100	560
3	75	4	100	600
3 1/2	88	4	100	700
4	100	4	100	800
4 1/2	113	5	100	900
5	125	5	100	1000
6	150	6	100	1200
8	200	6	100	1600



# RUBBER HOSE


## DELIVERY (ACID AND ALKALI HOSE) (GCD)

Specification : IS 7654 / 1987

### Types :


#### Type I

Conveying diluted chemicals

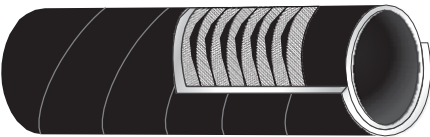

#### Type II

Conveying concentrated chemicals.

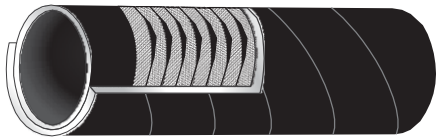

### Construction :

Tube : Natural Rubber.  
Reinforcement: Multiple plies rubber impregnated strong woven fabric or yarn braided.  
Cover : Black outer rubber cover resists abrasion, sunlight and weather.  
Ends : The ends of the hose in length shall be securely sealed with rubber, 1.5 mm in thickness to prevent liquids coming into contact with the fabric reinforcement.

Tube : Hypalon  
Reinforcement: Multiple plies rubber impregnated strong woven fabric or yarn braided.  
Cover : Hypalon resists abrasion, sunlight, weather and ozone.  
Ends : The ends of the hose in length shall be securely sealed with rubber, 1.5 mm in thickness to prevent liquids coming into contact with the fabric reinforcement.

**End Connection :** Couplings must be selected for corrosion and pressure.

For special application alternate construction can be supplied.

Tube : Nitrile, Neoprene, Butyl, SBR, EPDM, Thiokol.

Cover : Nitrile, Neoprene, Butyl, SBR, EPDM, Thiokol.

I.D. inches	I.D. mm	No. of plies	Working Pressure psi
$\frac{3}{4}$	20	4	150
1	25	4	150
$1\frac{1}{8}$	28	4	150
$1\frac{1}{4}$	31	4	150
$1\frac{3}{4}$	35	4	150
$1\frac{7}{8}$	38	4	100
$1\frac{3}{2}$	45	4	100
$2\frac{1}{4}$	50	4	100
$2\frac{3}{4}$	56	4	100
$2\frac{1}{2}$	63	4	100
$2\frac{3}{4}$	70	4	100
3	76	4	100
$3\frac{1}{2}$	88	4	100
4	100	4	100
5	125	5	100
6	150	6	100



# RUBBER HOSE


## PHOSPHORIC ACID SUCTION & DISCHARGE HOSE (GPS)



<b>Construction :</b>	
Tube	: Lining resistant to phosphoric acid & gypsum.
Reinforcement	: Several special high tensile textile fabric plies embedded with G.I. wire for suction & pressure loading, fitted with a rubber flange or with a rubber collar backing with steel flanges.
Cover	: Heat, weather & abrasion resistant.
Maximum I.D.	: 300mm.
Temperature	: 150°C.
MBR	: 8 multiply by dia.

<b>Application :</b>	
These hoses are very flexible allowing full flow. Abrasion & acid resistant available with or without wire reinforcement. Wire reinforcement type has coil of steel wire buried in hose to keep it from collapsing under full suction. Used in both suction & discharge hose. Flanged ends are drilled to bolt to companion flange using standard flat faced flanges. They provide a tight seal without a gasket since the flanges rotate freely. Alignment of bolt holes is easy, reducing installation time to minimum.	
Working pressure	: 3.5 kgf/cm <sup>2</sup> Type - I
	: 5.0 kgf/cm <sup>2</sup> Type - II
	: 10.0 kgf/cm <sup>2</sup> Type - III

## CARBON FREE HOSE (GCF)

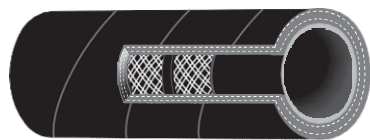

<b>Construction :</b>	
Lining	: Carbon free made from synthetic rubber having white wall.
Reinforcement	: Cotton textile fabric.
Cover	: Abrasion, weather & heat resistant.
Temperature	: Upto 150°C.
Working Pressure	: 10 Kgf/cm <sup>2</sup> .

Carbon free hoses are available in red, blue or green colour for identification.

I. D. inches	I. D. mm	No. of Braids	No. of Plies	Min. bend radius mm
1/2	12.5	2	3	100
3/4	20.0	2	3	160
1	25.0	2	3	200
1 1/4	31.5	3	4	252
1 1/2	35.0	3	4	280
1 3/4	38.0	3	4	304
2	45.0	3	4	360
2 1/4	50.0	4	5	400
2 1/2	55.0	4	5	440
2 3/4	63.0	4	6	504
3	70.0	4	6	560
3 1/4	75.0	4	6	600
-	90.0	-	6	720



# RUBBER HOSE

## BREWERY & CREMERY HOSE (GBC)


### FOOD, JUICE, MILK, DAIRY & CLEANING HOSE



<b>Construction :</b>			
Tube	: White smooth oil resistant synthetic rubber.	Tube	: White smooth oil resistant synthetic rubber.
Reinforcement	: Synthetic textile.	Reinforcement	: Synthetic textile.
Cover	: Blue, red or green oil resistant synthetic rubber.	Spiral	: Galvanized Steel.
Inside Diameter	: Upto 300 mm.	Cover	: Blue, red or green oil resistant rubber.
Working Pressure	: 7 Kgf/cm <sup>2</sup> .	Inside Diameter	: Upto 300 mm.
		Working Pressure	: 7 Kgf/cm <sup>2</sup> .
		Vacuum	: 625 mm of Hg

<b>Application :</b>		<b>Application :</b>	
Cleaning within food industry. It is used where hot water and cleaning solutions are necessary.		Pressure and suction hose for vegetable oil, grease, beer, wine, milk, cream, juice etc.	
Transport of food : Vegetable oil, grease, beer, wine, milk, cream etc.		Used as mainly tank truck hose.	

## CABLE / FURNACE COOLANT HOSE (GFC)

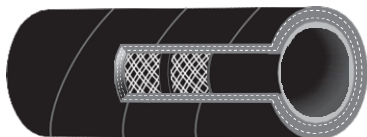

Construction :		inches	mm	mm	mm
Tube	: Synthetic Rubber.	1/2	12.5	23	110
Reinforcement	: Textile reinforcement.	3/4	19.0	32	170
Cover	: Cover can be provided with suitable material duly vulcanized or suitable yarn braiding is provided.	1	25.4	38	225
		1 1/4	31.5	45	285
		1 1/2	35.0	48	315
		1 3/4	38.0	53	345
		2	45.0	58	405
Temp. Range	: Upto 100°C.	2 1/4	50.0	63	450
This hose can be supplied in 3 types		2 1/2	55.0	75	495
1. Working Pressure 10 kgf/cm²		2 3/4	63.0	83	565
2. Working Pressure 15 kgf/cm².		3	70.0	90	630
3. Working Pressure 30 kgf/cm².		3 1/2	76.0	96	685
		4	90.0	110	800

<b>Application :</b>	
Used as Industrial Cooling hose for melting furnaces at steel works, glass works, foundries etc.	




## AIR, PNEUMATIC, ROCK DRILL HOSE

### Specification :

IS : 446 / 1980 (Amalgamated revision of IS : 446 / 1968 covering both textile woven and braided construction) or IS 911.

IS 446/87 - TYPE I, II & III

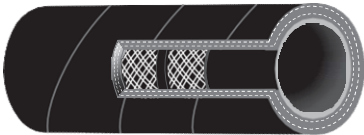

### Construction :

#### Air Hose, Pneumatic Hose

Lining:  
Rubber lining shall be free from porosity, air-blisters and any other visible defects.

Reinforcement : Shall be either woven fabric well rubberized on both sides or braided textile reinforcement with yarn, natural or synthetic or combination of both.

Cover : The outer cover shall be of high tensile abrasion resistant compound.

#### Rock Drill Hose

Lining:  
Rubber lining shall be resistant to oil mist.

### Availability of Sizes & Reinforcement Recommendation

I. D. mm	Type I		Type II		Type III	
	Wov.	Br.	Wov.	Br.	Wov.	Br.
5.0	2 Ply	1 Br.	2 Ply	1 Br.	3 Ply	1 Br.
6.3	2	1	2	1	3	1
8.0	2	1	3	1	3	1
10.0	2	1	3	1	4	1
12.5	2	1	3	2	4	2
16.0	2	1	3	2	4	2
20.0	3	1	4	2	5	2
25.0	4	2	5	2	6	3
31.5	4	2	5	3	6	3
38.0	4	2	5	3	7	3
50.0	-	-	6	3	-	-

50 mm & above sizes in Type I, II, III are supplied as per request.

### Types :

There are 3 types of hoses

- TYPE I** : Air hose for a working pressure 7 Kgf/cm<sup>2</sup>.
- TYPE II** : Pneumatic Tool hose for a working pressure 10 Kgf/cm<sup>2</sup>.
- TYPE III** : Rock Drill hose for a working pressure of 14 Kgf/cm<sup>2</sup>

### Test :

The hoses will undergo hydraulic test as per following :

- Type I** : Air Hose, Maximum burst pressure 28 Kgf/cm<sup>2</sup>.
- Type II** : Pneumatic Hose : Maximum burst pressure 40 Kgf/cm<sup>2</sup>.
- Type III** : Rock Drill Hose : Maximum burst pressure of 56 Kgf/cm<sup>2</sup>.

### Application :

These hoses are used for various applications like general construction work, road building, tunneling, in construction jobs used with chipping, grinding and riveting appliances; in Service for tyre inflation, for rock drilling applications in mine, and quarries etc.






# RUBBER HOSE

## SAND / SHOT BLASTING & CEMENT GROUTING HOSE (GSC)

**Specification :** IS 6417 or IS 5137



- Construction :**
- Tube : Highly abrasion resistant rubber
  - Reinforcement : Textile reinforcement.
  - Cover : Weather and abrasion resistant.
  - Electrical continuity : can be provided on request.

**Application :**  
For cleaning and blasting of castings, metal, stone and concrete surface.


**Different Types**

**Table :**

TYPE I : W.P. 7 Kgf/cm<sup>2</sup> B.P. 35 Kgf/cm<sup>2</sup>  
TYPE II: W.P. 10 Kgf/cm<sup>2</sup> B.P. 50 Kgf/cm<sup>2</sup>  
TYPE III: W.P. 14 Kgf/cm<sup>2</sup> B.P. 70 Kgf/cm<sup>2</sup>

I. D. inches	I. D. mm	O. D. mm	Min. bend radius mm
3/4	19.0	40	170
1	25.4	46	200
1 1/4	31.5	55	230
1 1/2	38.0	60	285
2	50.0	73	450
2 1/2	63.0	87	570
3	76.0	98	700
4	102.0	125	920

## SAND AND GRAVEL HOSE (GSG)



- Construction :**
- Tube : Wear or abrasion resistant
  - Reinforcement : Cotton textile reinforcement, fully embedded G.I. steel wire.
  - Cover : Abrasion & weather resistant.

**End Connection :** Flanged type or as per Client's requirements.

I. D. Inches	I. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
2	51.0	100	150	450
2 1/2	63.0	100	150	560
3	76.0	75	110	690
3 1/2	90.0	75	110	810
4	100.0	75	110	900
5	125.0	75	110	1100
6	152.0	75	110	1500
8	204.0	75	110	1850
10	250.0	75	110	2250

**Application :**  
Extraction and transport of abrasive materials such as Sand, Gravel, Rock, Sludge, Powder, etc.



WATER SUCTION HOSE


LIGHT DUTY

Specification :

Equivalent to IS 2482 of 1982 (Light) There are two types of Hoses in this specification

Type I - Smooth Bore.

Type II - Rough Bore (Semi – embedded)

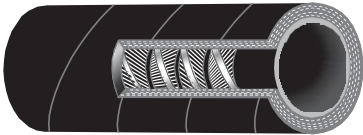

Construction :

Type : I

- Rubber Lining
- One ply of rubber impregnated fabric
- Spiral wire.
- Rubber Filler.
- Plies of rubber impregnated fabric & rubber cover.

Type : II

- Semi-embedded internal wire.
- Rubber Lining.
- Rubber Filler.
- Plies of rubber impregnated fabric & rubber cover.

Availability Of Sizes :

I. D. inches	I. D. mm	No. of Plies	Max. discharge pressure kgf/cm <sup>2</sup>
1	25	3	2
1 <sup>1</sup> / <sub>4</sub>	32	3	2
1 <sup>1</sup> / <sub>2</sub>	38	3	2
1 <sup>3</sup> / <sub>4</sub>	45	3	1.5
2	50	4	1.5
2 <sup>1</sup> / <sub>4</sub>	56	4	1.5
2 <sup>1</sup> / <sub>2</sub>	63	4	1
3	75	5	1
3 <sup>1</sup> / <sub>2</sub>	88	6	1
4	100	6	1
5	125	6	1
6	150	6	1
8	200	6	1

Higher sizes can also be supplied but not covered under IS specifications.


Application :

These hoses are used on Agricultural Pump Sets and other Water pumps.



PROJECT QUALITY DOUBLE ARMoured - HEAVY DUTY

Specification :  
EQUIVALENT TO IS-3549 of 1983.

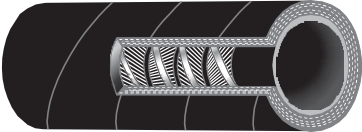

Construction :

ROUGH BORE HOSE

- Galvanized mild steel internal wire.
- One ply of Rubber impregnated woven fabric.
- Rubber Lining.
- Plies of Rubberised cotton fabric.
- Galvanized mild steel embedded wire.
- Rubber Filler.
- Plies of Rubber Impregnated Woven.
- Cotton Fabric.
- Rubber Cover.

SMOOTH BORE HOSE

- Rubber Compound Lining.
- Ply or plies of Rubberised textile fabric.
- Galvanized mild steel embedded wire.
- Rubber filler
- Ply or plies or rubberised textile fabric
- Embedded wire.
- Rubber Cover.

End Connection : Flanged type or Threaded nipple, built in & vulcanized in hose.

Application :

These hoses are used on High Pressure Water Pumps required in various project like Irrigation, Coal Mines, Steel Plants, Railways Industries etc.

Availability Of Sizes & Recommended Pressures :

I. D. inches	I. D. mm	No. of plies	Discharge Pressure Kgf/cm <sup>2</sup>	Vacuum Max. mm of Hg
2	50	3	7	-
2½	63	4	7	-
3	75	5	7	-
4	100	6	5	-
5	125	7	5	625
6	150	8	5	-
8	200	10	5	-
10	250	12	5	-
12	300	16	5	-

Above 75mm, hoses can be supplied in longer lengths but not covered under I.S. specifications.  
These hoses are supplied with internal & external armour.




# RUBBER HOSE

## HIGH PRESSURE HYDRAULIC HOSE

### SAE – 100 R1 / EN 853 1SN/ DIN 20022 1SN

#### Specification :

Conforming to Std. SAE – 100 R1



#### Construction :

- Tube : Seamless oil resistant.
- Reinforcement : One braid of HTS Wire.
- Cover : Oil, weather & abrasion resistant.
- Temperature : (- 40°C) to 120°C.
- End Connection : Swaged or Crimped or Reusable type.

#### Application :


For high pressure hydraulic oils, fuel, lubricating oils, water and air.

I. D. Inches	I. D. mm	O. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
$\frac{3}{16}$	4.8	11.8	3000	6000	89
$\frac{1}{4}$	6.4	13.4	2750	5500	102
$\frac{5}{16}$	7.9	15.0	2500	5000	114
$\frac{3}{8}$	9.5	17.4	2250	4500	127
$\frac{13}{32}$	10.3	18.9	2250	4500	140
$\frac{1}{2}$	12.7	20.5	2000	4000	178
$\frac{5}{8}$	15.9	23.7	1500	3000	203
$\frac{3}{4}$	19.0	27.7	1250	2500	241
$\frac{7}{8}$	22.2	31.8	1125	2250	279
1	25.4	35.6	1000	2000	305
$1\frac{1}{4}$	31.8	44.8	625	1250	419
$1\frac{1}{2}$	38.1	50.6	500	1000	508
2	50.8	64.1	375	750	635

### SAE – 100 R2 / EN 853 2SN / DIN 20022 2SN

#### Specification :

Conforming to Std. SAE – 100 R2.



#### Construction :

- Tube : Seamless oil resistant.
- Reinforcement : Two braids of HTS wire.
- Cover : Oil, weather & abrasion resistant.
- Temperature : (-40°C) to 120°C.
- End Connection : Swaged or Crimped or Reusable type

#### Application :

For high pressure hydraulic oils, fuel, lubricating oils, water and air.


I. D. Inches	I. D. mm	O. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
$\frac{3}{16}$	4.8	14.1	5000	10000	89
$\frac{1}{4}$	6.4	15.7	5000	10000	102
$\frac{5}{16}$	7.9	17.3	4250	8500	114
$\frac{3}{8}$	9.5	19.7	4000	8000	127
$\frac{1}{2}$	12.7	23.1	3500	7000	178
$\frac{5}{8}$	15.9	26.3	2750	5500	203
$\frac{3}{4}$	19.0	30.2	2250	4500	241
$\frac{7}{8}$	22.2	33.4	2000	4000	279
1	25.4	38.9	2000	4000	305
$1\frac{1}{4}$	31.8	49.6	1650	3250	419
$1\frac{1}{2}$	38.1	56.5	1250	2500	508
2	50.8	68.6	1125	2250	635



# RUBBER HOSE

## SAE – 100 R3

**Specification :**  
Conforming to std. SAE – 100 R3 / EN 854 R 3

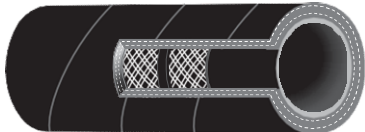


- Construction :**
- Tube : Seamless oil resistant.
  - Reinforcement : Two braids of suitable textile yarn.
  - Cover : Oil & Weather resistant.
  - Temperature : (-40°C) to 90°C.
  - End Connection :** Swaged or Crimped or Reusable type.

**Application :**  
Hydraulic oil, fuel, lubricating oil, anti-freeze solutions and water.

I. D. Inches	I. D. mm	O. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
$\frac{3}{16}$	4.8	12.7	1500	3000	76
$\frac{1}{4}$	6.4	14.3	1250	2500	76
$\frac{5}{16}$	7.9	17.5	1200	2400	102
$\frac{3}{8}$	9.5	19.0	1125	2250	102
$\frac{1}{2}$	12.7	23.8	1000	2000	127
$\frac{5}{8}$	15.9	27.0	875	1750	140
$\frac{3}{4}$	19.0	31.8	750	1500	152
1	25.4	38.1	565	1125	203
$1\frac{1}{4}$	31.8	44.5	375	750	254
$1\frac{1}{2}$	38.1	50.8	250	500	305

## SAE – 100 R4

**Specification :**  
Conforming to std. SAE – 100 R4

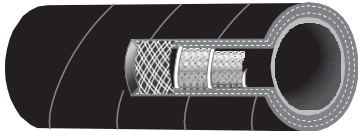


- Construction :**
- Tube : Seamless oil resistant.
  - Reinforcement : Consisting of braided textile fibres with a suitable spiral of helical wire.
  - Cover : Synthetic rubber, Oil, Weather and Abrasion Resistant.
  - Vacuum : 25" Hg.
  - Temperature : (-40°C) to 110°C.
  - End Connection :** Swaged or Crimped or Reusable type.

I. D. Inches	I. D. mm	O. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
$\frac{3}{4}$	19.0	34.9	300	600	127
1	25.4	41.3	250	500	152
$1\frac{1}{4}$	31.8	50.8	200	400	203
$1\frac{1}{2}$	38.1	57.2	150	300	254
2	50.8	69.9	100	200	305



# RUBBER HOSE

## TRIPLE WIRE BRAIDED HOSE

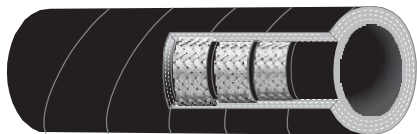


- Construction :**
- Tube : Seamless oil resistant.
  - Reinforcement : Three Braids of HTS wire.
  - Cover : Oil and weather resistant.
  - Temperature : (-40°C) to 100°C
  - End Connection :** Swaged or Crimped or Reusable type.

**Application :**  
For extra high pressure hydraulic oil, fuel, lubricating oil, water and air.

I. D. Inches	I. D. mm	O. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
$\frac{3}{16}$	4.8	16.1	6250	12500	127
$\frac{1}{4}$	6.4	17.9	6250	12500	127
$\frac{5}{16}$	7.9	20.2	5500	11000	140
$\frac{3}{8}$	9.5	22.5	5250	10500	152
$\frac{1}{2}$	12.7	25.8	4750	9500	203
$\frac{5}{8}$	15.9	29.5	4250	8500	254
$\frac{3}{4}$	19.0	34.0	3500	7000	280
1	25.4	41.5	3200	6400	330
$1\frac{1}{4}$	31.8	50.8	2500	5000	432
$1\frac{3}{4}$	38.1	57.5	2000	4000	533
2	50.8	70.7	2000	4000	673


## FOUR PLY SPIRAL HOSE

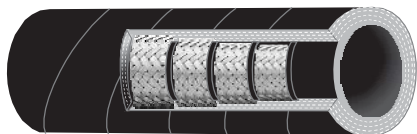

**Specification :**  
Conforming to SAE 100 R12 / EN 856 R12  
Hose construction consists of seamless rubber liner, four spirally wound steel wire ply reinforcement, wrapped in alternative directions and oil, weather and temperature resistant synthetic rubber cover.

I. D. Inches	I. D. m	O. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
$\frac{3}{8}$	9.5	19.95	16000	24000	125
$\frac{1}{2}$	12.7	23.55	16000	24000	175
$\frac{3}{4}$	19.0	30.70	16000	24000	240
1	25.4	38.00	16000	24000	300
$1\frac{1}{4}$	31.8	47.00	12000	18000	415
$1\frac{3}{4}$	38.1	53.45	10000	15000	500
2	50.8	66.70	10000	15000	635

## SIX PLY SPIRAL HOSE



**Specification :**  
Conforming to SAE 100 R13 / EN 856 R13  
Hose construction consist of a seamless synthetic rubber liner with six plies of spirally wound steel reinforcement conforming to the requirements.

I. D. Inches	I. D. mm	O. D. mm	Working pressure psi	Test pressure psi	Min. bend radius mm
$1\frac{1}{4}$	31.8	48.35	5750	8625	610
$1\frac{1}{2}$	38.1	56.35	5250	7875	710
2	50.8	71.45	5000	7500	915





# INSTALLING FLEXIBLE METAL HOSE

To assure maximum service life, the following precaution should be adhered to when installing a flexible metal hose assembly.

CORRECT	INCORRECT

- Avoid Over bending
- Avoid Improper Handling
- Avoid Torque and Twisting.




# MODES OF MOVEMENT & MOTION - FLEXIBLE HOSE

## FLEXIBLE HOSES ARE USED FOR THE FOLLOWING MODES OF MOVEMENT.


- 1. **STATIC INSTALLATIONS** : Where the Flexible hose is used to connect pipe work out of alignment and remain in static position.
- 2. **OCCASIONAL FLEXING** : When the hose is only required to flex occasionally, such as manual handling.
- 3. **CONSTANT FLEXING** : When the hose is required to flex continuously, usually on moving machinery.
- 4. **VIBRATION** : High frequency, Low amplitude movement, i.e. on a compressor.

## PRESSURE - FOUR EFFECTS




### SYSTEM PRESSURE :

System pressure is the first factor considered in selecting a hose or wall thickness. Where significant pressure fluctuations are not present, a standard hose may be selected by choosing one rated at a pressure equal to or greater than your nominal operating pressure.




### PULSATING PRESSURE :

Pulsating pressure is a continuous rippling pressure superimposed on the operating pressure. If the pulsations are significant it is proper to provide margin in selecting the rated pressure for a standard hose.



### SURGE PRESSURE :


Surge pressure usually occurs during system start up, shut down and rapid valve closure. It is proper to consider the possibility of surge pressure and to provide adequate margin.



### FLEXIBILITY :


Logically, increasing pressure requires a heavier wall and braid tightens the braid grip increasing hose stiffness proportionately. As covered in the vibration section the tightening of the braid is valuable in controlling vulnerability by providing necessary damping.

## HOSE MOTION – THREE TYPES




### ANGULAR MOTION :

Occurs when one end of the hose is held fixed and the other is deflected in an arc.



### OFFSET MOTION :

Occurs when one end of the hose is fixed and the other end is offset but remains parallel to the fixed end. Do not allow this motion to stretch the hose. Use a stress relief loop or equivalent to provide slack.



### AXIAL MOTION :

Occurs when one end of the hose is held and the other end of the hose is deflected along the axis of the hose. This type of motion should only be applied to unbraided annular hose or to braided hose where a stress relief loop or offset is provided so that the motion is only locally axial and the hose is not stretched or compressed.



# HOSE REELS

## FIRE WATER FOAM HOSE REEL


Water supply through the center of the hose reel. Oil resistant, antistatic rubber hose with working pressure 20 bar. Nozzle 200 LPM (95 GPM nozzle) foam educator adjustable for 0 – 6% mixture of foam concentrate. 2" SST isolation valve.

Water inlet 2" BSP female thread. 1:3 gearing device with hand crank. Foam tank stainless steel AISI 316L. Design Temp. 0 to 35 Degree C. Hose Reel of galvanized steel. Waterways can be made of gunmetal / SS / Cupro- nickel, Titanium grade 2. Working pressure 3- 10 Bar. Color – RAL 3000 red.


### Option

Piping Cu 90/10 with Alu bronze valve or Super Duplex Stainless Steel. Foam educator – Alu bronze Super DuplexStainless Steel or Titanium.

For any other special material requirement, kindly contact our technical department.



ISOMETRIC VIEW



ELEVATION


## UTILITY HOSE REEL

Galvanized welded steel hose reel drum with single length non collapsible, non-kinkable hose. Externally coated with oil and abrasion resistant material to protect them from sunlight or mild dew damage with end connections.


Hose reel assembly shall be mounted on a frame.

Nozzles made of chrome plated brass, 95 GPM capacity.

For Hose and Hose Reel Size or any other specific requirement, kindly contact our technical department.



ISOMETRIC VIEW



ELEVATION



# HOSE SIZE & THREAD SIZE SELECTION CHART

## FOR ALL TYPES OF HOSE

Hose Size inches	mm/nw	Corresponding Thread				Stand Pipe		NPTF*	
		BSP inches	NPT inches	SAE inches	Metric	Pipe dia mm	Length mm	Thread inches	TPI
3/16	4	1/4	1/4	7/16 20 UNF	M 12 x 1.5 M 16 x 1.5	6 8	20 22	1/8 1/4	27 18
1/4	6	1/4	1/4	7/16 20 UNF 1/2 20 UNF 9/16 18 UNF 5/8 18 UNF	M 14 x 1.5 M 16 x 1.5 M 18 x 1.5	8 10 12	22 24 25	1/8 1/4 3/8	27 18 18
5/16	8	3/8	3/8	1/2 20 UNF 9/16 18 UNF 5/8 18 UNF	M 16 x 1.5 M 20 x 1.5	10 12	24 25	1/4 3/8	18 18
3/8	10	3/8 1/2	3/8 1/2	1/2 20 UNF 9/16 18 UNF 3/4 16 UNF 7/8 14 UNF	M 18 x 1.5 M 22 x 1.5	12 14 10	25 27 24	1/4 3/8 1/2	18 18 14
1/2	13	1/2	1/2	9/16 18 UNF 3/4 16 UNF 7/8 14 UNF 1 12 UNF	M 22 x 1.5 M 24 x 1.5 M 26 x 1.5	15 16 18 20	25 30 25 32	3/8 1/2 3/4	18 14 14
5/8	16	5/8 3/4	3/4	3/4 16 UNF 7/8 14 UNF 1 12 UNF	M 26 x 1.5	18 20	25 32	3/4	14
3/4	20	3/4 1	3/4 1	7/8 14 UNF 1 12 UNF 1 12 UNF 1 12 UNF	M 30 x 1.5 M 30 x 2.0 M 36 x 2.0	22 25	25 34	3/4 1	14 11 1/2
1	25	1 1 1/4	1 1 1/4	1 1/8 12 UNF 1 1/8 12 UNF	M 38 x 1.5 M 42 x 2.0	28 30	25 or 40 36 40	1	11 1/2
1 1/4	32	1 1/4 1 1/2	1 1/4 1 1/2	1 5/8 12 UNF 1 7/8 12 UNF	M 45 x 1.5 M 52 x 1.5	38 30 35	38 35 30	1 1/4	11 1/2
1 1/2	38	1 1/2 2	1 1/2 2	1 7/8 12 UNF 2 1/4 12 UNF 2 1/2 12 UNF	M 52 x 1.5 M 52 x 2.0	42 50	36 70	1 1/2 2	11 1/2 11 1/2
2	50	2 2 1/2	2 2 1/2	2 1/2 12 UNF	M 65 x 2.0	-	-	2	11 1/2
2 1/2	63	2 1/2 3	2 1/2 3	3 12 UNF	M 78 x 2.0	-	-	-	-
3	76	3	3	-	M 100 x 2.0	-	-	-	-

Note: The National Pipe Tapered Thread for fuels is a dry seal thread used for both male and female ends. The interference crest and root fit of the mating threads produces the seal. (This thread should not be confused with American Standard NPT thread which does not produce crest and root seal).




## STANDARD END CONNECTIONS FOR 'CONVOFLEX' SS CORRUGATED FLEXIBLE METAL HOSE




FIXED MALE CONNECTOR




FIXED FEMALE CONNECTOR

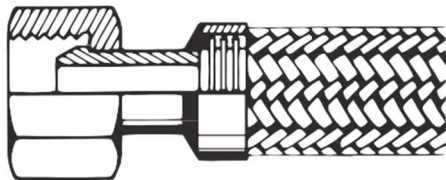


SWIVEL FEMALE UNION

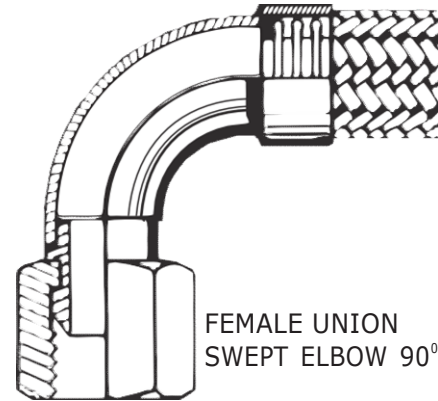

FEMALE UNION  
SWEEP ELBOW 90°

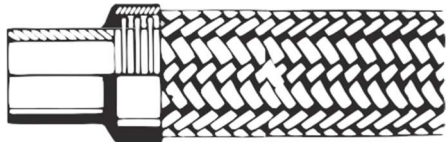

STAND PIPE

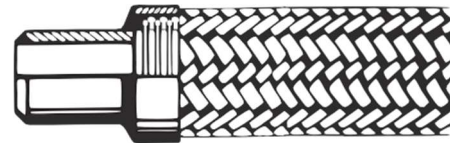


PIPE END




FIXED FLANGE




FIXED FLANGE ON PIPE END

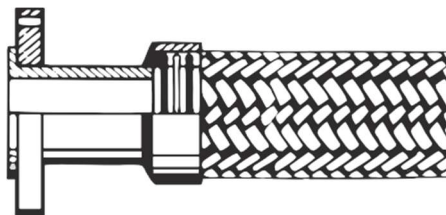

SWIVEL FLANGE



MALE/FEMALE  
THREADED ADAPTOR



MALE/FEMALE  
THREADED ADAPTOR

**Material of End Connection:** M. S. Carbon Steel, Brass, G. M., SS 304/304L/316/316L/321.

**Type of End Connection** : Threaded type (BSP, BSPT, NPT, NPTF, METRIC, SAE, JIC)

























**Flange** : As per ASME, BS, ASA, DIN, Slip-on, Weld neck, RTJ or as per Client's requirement.

**Connections** : Argon or Tig Welding or Brazed.





END FITTINGS FOR PTFE HYDRAULIC & RUBBER HOSE

<p><b>OM1</b></p>  <p>Metric Female Swivel</p>	<p><b>OM2</b></p>  <p>Metric Female Swivel 45° elbow</p>	<p><b>OM3</b></p>  <p>Metric Female Swivel 90° elbow</p>	<p><b>OM4</b></p>  <p>BSP Female Swivel</p>
<p><b>OM5</b></p>  <p>BSP Female Swivel 45° elbow</p>	<p><b>OM6</b></p>  <p>BSP Female Swivel 90° elbow</p>	<p><b>OM7</b></p>  <p>Metric Female Swivel with 'O' ring</p>	<p><b>OM8</b></p>  <p>Metric Female Swivel 45° elbow with 'O' ring</p>
<p><b>OM9</b></p>  <p>Metric Female Swivel 90° elbow with 'O' ring</p>	<p><b>OM10</b></p>  <p>Male BSP with 60° Flare</p>	<p><b>OM11</b></p>  <p>Male with metric thread mating</p>	<p><b>OM12</b></p>  <p>Male NPTF</p>
<p><b>OM13</b></p>  <p>Male SAF with 45° taper</p>	<p><b>OM14</b></p>  <p>Male JIC with 37° taper</p>	<p><b>OM15</b></p>  <p>Female Swivel JIC</p>	<p><b>OM16</b></p>  <p>Female Swivel JIC 45° elbow</p>
<p><b>OM17</b></p>  <p>Female Swivel JIC 90° elbow</p>	<p><b>OM18</b></p>  <p>Female Swivel SAE</p>	<p><b>OM19</b></p>  <p>Female Swivel SAE 45° elbow</p>	<p><b>OM20</b></p>  <p>Female Swivel SAE 90° elbow</p>
<p><b>OM21</b></p>  <p>SAE split flange</p>	<p><b>OM22</b></p>  <p>SAE split flange 45°</p>	<p><b>OM23</b></p>  <p>SAE split flange 90°</p>	<p><b>OM24</b></p>  <p>Stand pipe</p>






CAMLOCK COUPLINGS (GCC)

Design Principle :

The principle behind the design of Camlock Coupling is simple. Pivot pins for coupler cam arms which lock into the adaptor groove are located so that when line pressure attempts to force the camlock coupler and adaptor apart, the bottom edge of the adaptor groove pushes with equal pressure against the under edge of the cam arms, increasing the locking action. When properly coupled, line pressure will not separate a camlock connection within recommended pressure limits.

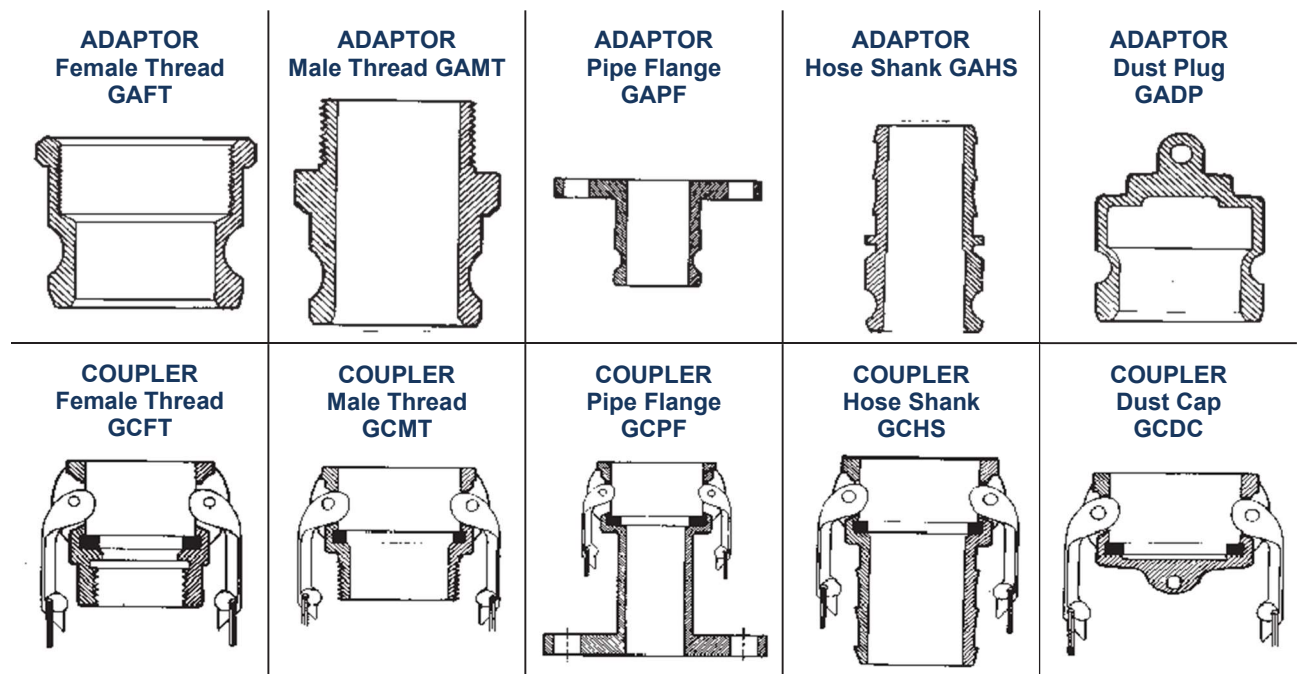


End Connection	: Socket Weld, Hose thread, Pipe thread, Hose shank and Flanged.
	Sizes : ½" to 6"
	Working Pressure : UPto 500psi.
Temperature	: The coupling can handle fluids from (-40°C) to 250°C with right selection of body material and Gasket.
<b>Materials :</b>	
Body	: (1) Available in Aluminum, Carbon Steel, Brass, SS304 & SS316, Polypropylene, super duplex SS, Aluminum Bronze, Inconel and other exotic material as per clients requirements (2) Available in casting of carbon steel grade WCB or I.S. 1030, Gunmetal grade LG2C, Aluminum Bronze grade AB2C, SS 304 with c.f. 0.03 & SS316 with c. f. 0.08. (3) Available with PTFE Lining
Cam Arms	: Available in casting of SS304 (Cf8), Ss316 (CF8M), SS316L (CF3M) Gunmetal grade LG2C & Aluminum Bronze grade AB2C
Gasket	: Available in Nitrile, Viton, Neoprene, Silicone, Hypalon, PTFE or as per client’s requirement
Standard	: Our Camlock Couplings comply to BS EN 14220 & applicable MIL specifications like MIL-C-27487.



QUICK RELEASE COUPLING (GQRC)

This works on simple 'Push & Pull Principle'. The adaptor when pushed into the coupler is securely held by the self locking arrangements resulting in a positive and leak proof connection. This action simultaneously opens the valve and fluid flow starts. To disconnect, pull back the sleeve of the coupler, the adaptor ejects out and the valve shuts off automatically. Valves are provided in GSV and GDV type.

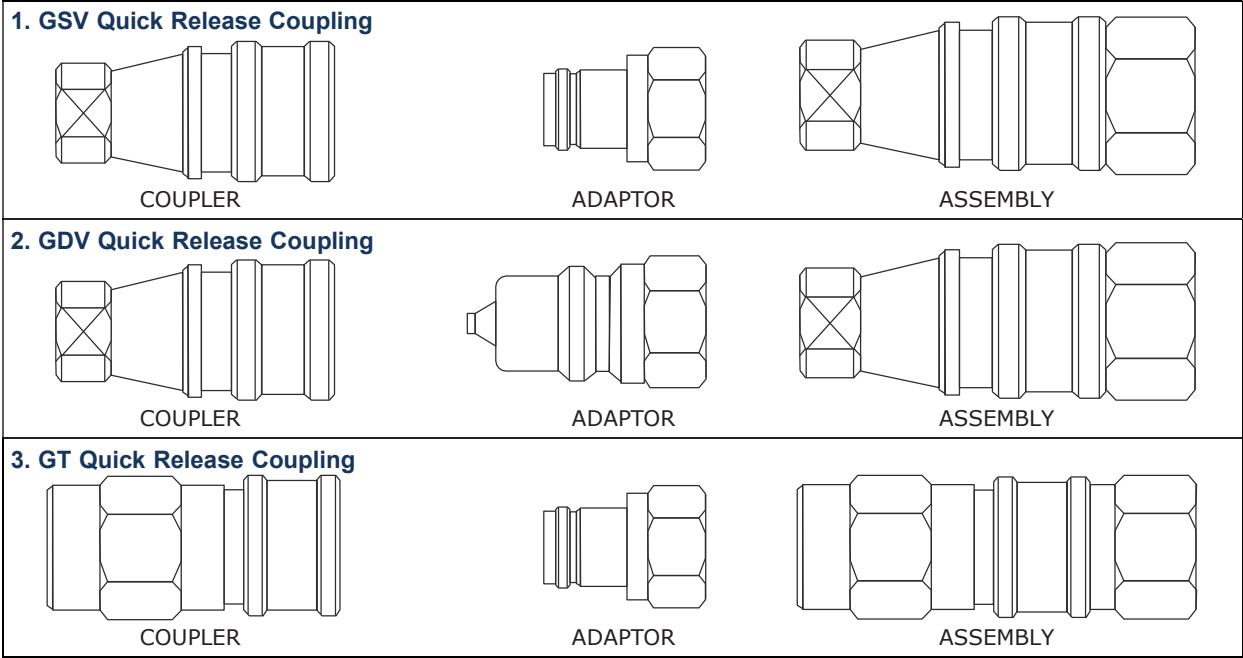

Types	:GSV	: Quick coupling with self sealing valve at the coupler end and through type adaptor.
	GDV	: Quick coupling with self sealing valve at coupler & adaptor ends.
	GT	: Quick coupling through type.

**End Connection** : Socket weld, hose thread, hose shank, pipe thread and flanged.  
Size : 1/8” to 2”  
Pressure : Upto 15000 psi.  
Temperature : (-25°C) to 250°C with right selection of body & material.

**Advantages** : Fast positive, Leak proof, instant connection, without tools, without threading or twisting, without strain, without sweat, hence time saving.

Materials	:Body	: Mild Steel, Carbon Steel duly hardened, Brass, Aluminum. SS304, SS316, SS316L & exotic metals.
	Spring	: Spring Steel, SS304, SS316, SS316L (Exotic Metal spring available on client’s request)
	Ball	: SS304, SS316, SS316L. (Exotic Metal balls available on client’s request)
	Seal Material	: Nitrile, Neoprene, Viton, Silicon, PTFE.
	Standard	: ISO 7241 Series A & Series B ISO 16028 for High Pressure Coupling High Pressure screw to connect coupling as per ISO 14540

Note - If required for High Pressure, High Temperature or corrosive services, we can also offer couplings in various exotic materials & seals like Inconel 625, Monel, Aluminum Bronze, etc. For more details, please contact our technical department on [info@omaa.co.in](mailto:info@omaa.co.in)



### DRY DISCONNECT COUPLING

OMAA's Couplings are designed and built to have resistance to the media transferred through them. Therefore, all Dry Disconnect Couplings are tailored to the requirements of each application, ensuring that all materials of the body and internal working parts are fully resistant.

#### **Stainless Steel.**

All wetted parts in Stainless Steel and Hastelloy.

##### **Typical applications:**

Chemical Industry  
Pharmaceutical Industry  
Waste Transfer

#### **Brass / Gunmetal**

All wetted parts Brass / Gunmetal and Stainless Steel.

##### **Typical applications:**

Marine refueling  
Petrol handling  
Tanker loading

#### **Aluminum**

All wetted parts in Aluminum and Stainless Steel.

##### **Typical applications:**

Military use  
Petrol handling  
Aviation fuel



#### **PEEK / Hastelloy**

All wetted parts in PEEK and Hastelloy.

##### **Typical applications:**

Hydrochloric acid

#### **Hastelloy**

All wetted parts in Hastelloy.

##### **Typical applications:**

Hydrochloric acid.

#### **Other materials**

Other materials on request.

For example, Titan, PVDF and Duplex.

### BREAK-AWAY COUPLING

OMAA's Safety Break-away couplings are used to prevent pull away accidents, protect terminal and loading/unloading equipment and eliminate unwanted product release. The break-away couplings have a diverted breaking point which will break at a determined break-load where upon the internal valves will automatically close on both sides. This will in a longer time frame minimize down time, save money, equipment and the environment.

The Safety Break-away couplings are available as Industrial and Marine type.

#### **Industrial Break-away**

Typically installed into loading arm and hose assemblies, where at least one side of the coupling is attached to a rig and fixed point.

#### **Marine Break-away**

Marine Safety Break-aways are designed to only release by inline pull and used between two strings of hose.

Size : 1" to 6" Higher Sizes available upon request

MOC : Brass, Stainless Steel & Aluminum.

(Also available in other metals upon request)





Figure 100

- These Hammer Unions are used in low pressure manifold lines and air, water, oil or gas applications.
- Available in both threaded and butt weld ends
- Metal to Metal Sealing surface



Figure 200

- These Hammer Unions are used in general service manifold lines and air, water, oil or gas applications
- Available in both threaded and butt weld ends
- Metal to metal sealing surface
- Available in butt weld schedules 40 and 80



Figure 400

- These Hammer Unions are used in manifold & line connections, pump suction and mud service
- Available in both threaded and butt weld ends
- 3" through 12" sizes have O-ring for primary seal
- Available in butt weld schedule 80




Figure 600

- These Hammer Unions are used in steam service, boiler connections, manifold and line connections for production, drilling and well servicing
- Available in bronze seating
- Will not rust in water services



Figure 1502

- These Hammer Unions are use in cementing, acidizing, choke and kill lines
- Replaceable lip type rubber seal
- Available in both threaded and butt weld ends



OTHER FITTINGS

CLAW TYPE / CHICAGO TYPE COUPLING

Nozzle




Male



Female

BUILT IN FLANGES

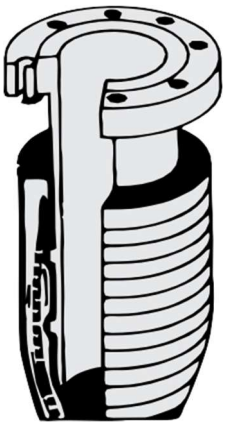

SMS UNION



HAMMER UNION

OMAA offers a comprehensive range of standard and sour gas Hammer Unions. Each union is thoroughly inspected to ensure long, dependable service in the most extreme conditions. Three lug nuts and self-locking ACME threads provide quick make-up and break-out.

Meet or exceed National Association of Corrosion Engineers Standard NACE MR-01-75 as and where applicable.

Manufactured from quality steel and other alloy meeting ASTM, UNS and/or AISI Standards.

The spherical surface male sub and angular surface female sub form a metal-to-metal seal. The ball and tangent provide a perfect seal.

Range from 1/2" to 12" with cold working pressures from 500 to 20,000 PSI.

Please Contact our Technical Department in case

- You have special materials and requirements.
- Details such as sizes and pressure / temperature rating are needed.

Hammer Unions are used in general service manifold lines and air, water, oil or gas applications.

Available in both threaded and but weld ends.

Metal to Metal Sealing surfaces.



## METALLIC

### Design

There are several different types of expansion joints. Each is designed to operate under a specific set of design conditions. Round and Rectangular Models are available

The information found in this catalogue provided by the **Expansion Joint Manufacturers Association**.

The following is a list of the basic types of expansion joints

SINGLE EXPANSION JOINT

DOUBLE EXPANSION JOINT

UNIVERSAL TIED EXPANSION JOINT

UNIVERSAL EXPANSION JOINT

SWING EXPANSION JOINT

HINGED EXPANSION JOINT

GIMBAL EXPANSION JOINT


PRESSURE BALANCE EXPANSION JOINT



## RUBBER EXPANSION JOINT

- Types :**
- Spool type (single arch – double arch)
  - Spherical type
  - Wide arch type
  - Concentric reducer type
  - Eccentric reducer type

- Benefits :**
- Greater Resistance to Shock
  - Natural Recovery From Movement.
  - Both Axial and Lateral Deflection
  - No Flex-cracking with Age
  - No Electrolysis Problem
  - Better Insulation Against Vibration And Sound
  - No Gaskets Needed.
  - Requires Less Space
  - Lighter Weight
  - Easier to Install
  - Higher Working Pressures.
  - Longer Service Life
  - Require No Maintenance.
  - Protecting piping and equipment systems from Stress / Motion.

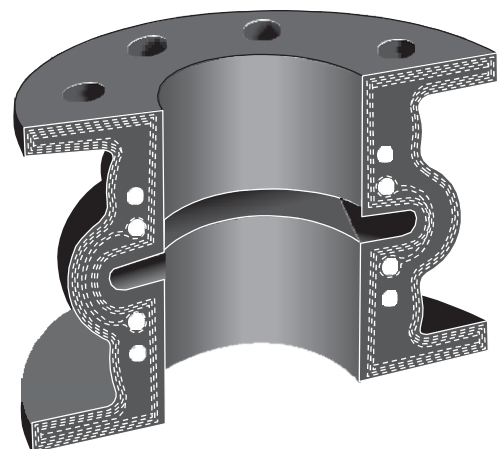





INSTALLATION INSTRUCTIONS

Metal Bellows Expansion Joints have been designed to absorb a specified amount of movement by flexing of the thin-gauge convolutions. If proper care is not taken during installation, it may reduce the cycle life and the pressure capacity of the expansion joints which could result in an early failure of the bellows elements or damage the piping system.

The following recommendations are included to avoid the most common errors that occur during installation. When in doubt about an installation procedure, contact the manufacturer for clarification before attempting to install the Expansion Joints.

DO'S	DONT'S
<ul style="list-style-type: none"><li>● Inspect for damage during shipment, i.e. dents, broken hardware, water marks on cartons, etc.</li><li>● Store in clean dry area where it will not be exposed to heavy traffic or damaging environment.</li><li>● Use only designated lifting lugs.</li><li>● Make the piping system fit the expansion joint. By stretching, compressing, or offsetting the joint to fit the piping, it may be overstressed when the system is in service.</li><li>● It is good practice to leave one flange loose until the expansion joint has been fitted into position. Make necessary adjustment of loose flange before welding.</li><li>● Install joint with arrow pointing in the direction of flow.</li><li>● Install single Van Stone liners pointing in the direction of flow. Be sure to install a gasket between the liner and Van Stone flange as well as between the mating flange and liner.</li><li>● With telescoping Van Stone liners, install the smallest I.D. liner pointing in the direction of flow.</li><li>● Remove all shipping devices after the installation is complete and before any pressure test of the fully installed system.</li><li>● Remove any foreign material that may have lodged between the convolutions.</li><li>● Refer to EJMA Standards for proper guide spacing and anchor recommendations.</li></ul>	<ul style="list-style-type: none"><li>● Do not drop or strike carton.</li><li>● Do not remove shipping bars until installation is complete.</li><li>● Do not remove any moisture-absorbing desiccant bags or protective coatings until ready for installation.</li><li>● Do not use hanger lugs as lifting lugs without approval of manufacturer.</li><li>● Do not use chains or any lifting device directly on the bellows or bellows cover.</li><li>● Do not allow weld splatter to hit unprotected bellows. Protect with wet chloride-free insulation.</li><li>● Do not use cleaning agents that contains chlorides.</li><li>● Do not use steel wool or wire brushes on bellows.</li><li>● Do not force-rotate one end of an expansion joint for alignment of bolt holes. Ordinary bellows are not capable of absorbing torque.</li><li>● Do not hydrostatic pressure test or evacuate the system before installation of all guides and anchors.</li><li>● Pipe hangers are not adequate guides.</li><li>● Do not exceed a pressure test of 1 ½ times the rated working pressure of the expansion joint.</li><li>● Do not use shipping bars to retain thrust if tested prior to installation.</li></ul>

The Manufacturer's warranty may be void if improper installation procedures have been used.

In keeping with a policy of continual improvements in design, we reserve the right to alter the specification of the product features without notice. The product detail in this brochure should only be used for the process suggested and under the condition specified. If under consideration for a potentially dangerous applications consult our Technical Department.



# CHEMICAL RESISTANCE CHART



This chemical Resistance Chart is intended as a guide to the materials which may be appropriate for various conveyants. The indicated extent of resistance refers to the material such. This information is presented as a general guide only. It represents the effects of a given chemical on PTFE and various materials. It is not intended to establish absolute compatibility with OMAA ConvoFlex Metallic hose, PTFE hose product. In cases where the choice of material, is in any doubt whatever, we suggest that our technical department is called for advise.

**Material Compatibility Key : 1. Excellent 2. Acceptable 3. Not Recommended 0. No Information, Test Before Using**

Chemical	PTFE	CS	SS 321 SS 304	SS 316	BRASS
Acetaldehyde	1	1	1	1	1
Acetic Acid Glacial	1	0	2	2	0
Acetic Acid, 30%	1	3	2	2	3
Acetic Anhydride	1	3	2	2	3
Acetone Boiling	1	1	1	1	1
Acetylen*	1	0	1	1	2
Acrylonirile	1	1	1	1	0
Alum, Ammonium or Potassium	1	3	2	2	3
Aluminum Acetate	1	0	1	1	3
Aluminum Bromide	1	3	2	2	3
Aluminum Chloride	1	3	2	2	3
Aluminum Fluoride	1	3	2	2	3
Aluminum Hydroxide	1	1	1	1	1
Aluminum Nitrate	1	3	1	1	0
Aluminum Salts	1	0	2	2	0
Aluminum/Sulfate/Sulphate	1	3	2	2	3
Ammonia, Anhydrous	1	1	1	1	0
Ammonium Aqueous	1	0	1	1	3
Ammonium Carbonate	0	1	1	1	0
Ammonium Chloride	1	0	2	2	3
Aluminum Hydroxide	1	2	1	1	3
Ammonium Metaphosphate	1	1	1	1	0
Ammonium Nitrate Boiling	1	1	1	1	3
Ammonium Nitrite	0	0	1	1	0
Ammonium Persulfate	0	0	1	1	0
Ammonium Phosphate	1	3	2	1	0
Ammonium Sulfate/Sulphate	1	1	1	1	3
Ammonium Thiocyanate	1	1	1	1	0
Amyl Acetate	1	3	1	1	1
Amyl Alcohol	1	1	1	1	1
Amyl Chloride	1	0	1	1	0
Amyl Chloronapthalene	1	0	1	1	0
Amyl Naphthalene	1	0	1	1	0
Aniline	1	2	1	1	3
Aniline Dyes	1	3	1	1	0
Aniline Hydrochloride	1	0	3	3	3
Animal Fats	1	1	1	1	0
Aqua Regia	1	0	3	3	0
Arsenic Acid	1	2	0	1	0
Askarel	0	1	1	1	1
Asphalt	1	1	1	1	2
Barium Carbonate	1	2	1	1	1
Barium Chloride 5% Saturated	1	3	1	1	2
Barium Hydroxide-Aqueous Sol. Hot	1	2	1	1	0
Barium Sulfate / Sulphate	1	3	1	1	2
Barium Sulfide/Sulphide	1	3	1	1	3
Beer	1	2	1	1	1
Beet Sugar Liquors	1	1	1	1	0
Benzene (Benzol)	1	1	1	1	1
Benzene Sulfonic Acid	0	3	0	2	0
Benzaldehyde	1	1	0	0	0
Benzene	1	1	1	1	1
Benzyl Alcohol	1	1	1	1	1

Chemical	PTFE	CS	SS 321 SS 304	SS 316	BRASS
Benzyle Benzoate	1	1	1	1	0
Benzyl Chloride	1	1	0	0	0
Bismuth Carbonate	1	1	1	1	0
Black Sulfate Liquor	1	1	1	1	0
Blast Furnace Gas	1	1	1	1	1
Borax	1	2	1	1	2
Bordeaux Mixture	1	0	1	1	0
Boric Acid	1	3	2	1	3
Bunker Oil	1	1	1	1	1
Butadine	1	0	1	1	1
Butane	1	1	1	1	1
Butter Oil	1	1	1	1	1
Butyric Acid	1	3	1	1	3
Butyl Acetate	1	0	1	1	0
Butyl Alcohol	1	0	0	0	1
Butyl Amine	0	1	1	1	1
Butyl Carbitol	1	1	1	1	1
Butyl Sterate	1	1	1	1	1
Butyl Mercaptan	1	0	1	1	0
Butyraldehyde	1	0	0	0	1
Calcium Acetate	1	1	1	1	1
Calcium Bisulfate	1	0	1	1	1
Calcium Bisulfite	1	0	1	1	1
Calcium Carbonate	1	1	1	1	0
Calcium Chlorate	1	0	0	0	1
Calcium Chloride	1	3	2	1	2
Calcium Hydroxide	1	3	3	1	2
Calcium Hypochloride 2%	1	0	3	2	3
Calcium Nitrate	1	1	1	1	1
Calcium Silicate	1	1	1	1	1
Calcium Sulfate / Sulphate	1	3	1	1	1
Calcium Sulfide	1	1	1	1	0
Cane Sugar Liquors	1	1	1	1	2
Carbonic Acid	1	3	1	1	3
Carbon Dioxide	1	1	1	1	1
Carbon Disulfide	0	2	1	1	2
Carbonic Acid	1	3	1	1	3
Carbon Monoxide	1	1	1	1	1
Carbon Tetrachloride	1	3	2	2	2
Castor Oil	1	1	1	1	1
Caustic Soda	1	2	1	1	3
Cellosolve, Acetate	1	1	1	1	0
Cellosolve, Butyl	1	1	1	1	0
Cellulube	1	1	1	1	1
Chlorine, Gaseous, Dry	1	2	3	3	2
Chlorine, Gaseous, Wet	1	3	3	3	3
Chlorine Trifluoride	0	3	0	0	0
Chloroacetic Acid	1	3	3	3	2
Chlorobenzene	1	1	1	1	1
Chlorobromomethane	1	1	1	1	1
Chloroform	1	1	1	1	1
Chlorobromomethane	1	1	1	1	1
Chlorotoluene	1	1	1	1	1

# CHEMICAL RESISTANCE CHART



Material Compatibility Key : 1. Excellent 2. Acceptable 3. Not Recommended 0. No Information, Test Before Using

Chemical	PTFE	CS	SS 321 SS 304	SS 316	BRASS
Chromic Acid	1	3	3	2	3
Citric Acid	1	3	3	1	3
Cod Liver Oil	1	1	1	1	1
Coke Oven Gas	1	1	1	1	0
Copper Chloride	1	3	3	1	3
Copper Cyanide	1	0	1	1	3
Copper Sulfate / Sulphate	1	3	1	1	3
Corn Oil	1	1	1	1	1
Corn Syrup	1	1	1	1	0
Cottonseed Oil	1	1	1	1	1
Creosote	1	2	1	1	3
Cresol	1	2	1	1	0
Crude Wax	1	1	1	1	1
Cutting Oil	1	1	1	1	1
Cyclohexane	1	1	1	1	1
Cyclohexanone	1	0	1	1	0
Cymene	1	0	0	0	1
Decalin	1	0	0	0	1
Denatured Alcohol	1	1	1	1	1
Diacetone	1	1	1	1	1
Diacetone Alcohol	1	1	1	1	1
Dibenzyl Ether	1	1	1	1	1
Dibutyl Ether	1	1	1	1	1
Dibutyl Phthalate	1	1	1	1	1
Dibutyl Sebacate	1	0	0	0	1
Dichlorobenzene	1	0	1	1	1
Diesel Oil	1	1	1	1	1
Diethylamine	1	3	0	2	3
Diethyl Ether	1	1	1	1	1
Diethylene Glycol	1	1	1	1	1
Diethyl Phthalate	1	0	1	1	1
Diethyl Sebacate	1	0	1	1	1
Di-Isobutylene	0	0	1	1	1
Di-Isopropyl Ketone	1	0	1	1	1
Dimethyl Aniline	1	0	0	0	1
Dimethyl Formamide	0	1	1	1	0
Dimethyl Phthalate	1	0	0	0	1
Dioctyl Phthalate	1	1	1	1	1
Dioxane	1	1	1	1	1
Dipentene	1	1	1	1	1
Ethanolamine	1	1	1	1	1
Ethyl Acetate	1	1	1	1	1
Ethyl Acetoacetate	1	2	1	1	2
Ethyl Acrylate	1	2	1	1	1
Ethyl Alcohol 20% & Boiling	1	1	1	1	2
Ethyl Benzene	1	1	1	1	1
Ethyl Cellulose	1	1	1	1	1
Ethyl Chloride	1	2	1	1	2
Ethyl Ether	1	2	1	1	1
Ethyl Mercaptan	1	2	0	0	0
Ethyl Pentachlorobenzene	1	2	1	1	1
Ethyl Silicate	1	1	1	1	1
Ethylene Chloride	1	2	1	1	2
Ethylene Chlorohydrin	1	0	0	0	0
Ethylene Diamine	1	0	0	0	1
Ethylene Glycol	1	2	1	1	1
Fatty Acids	1	1	1	1	1
Ferric Chloride	1	2	1	1	2
Ferric Nitrate	1	0	0	0	0
Ferric Sulfate	1	0	0	0	1
Ferrous Chloride					

Chemical	PTFE	CS	SS 321 SS 304	SS 316	BRASS
Ferrous Nitrate	1	0	1	1	0
Ferrous Sulfate	1	3	1	1	2
Fluoroboric Acid	1	0	1	1	0
Formaldehyde	1	0	1	1	1
Formic Acid	1	3	2	1	2
Freon 12	2	3	1	1	0
Freon 114	2	3	1	1	0
Fuel Oil	1	2	2	2	1
Fumaric Acid	0	0	0	1	0
Furan Furfuran	1	1	1	1	1
Furfural	3	2	1	1	1
Gallic Acid	0	3	1	1	0
Gasoline	1	2	1	1	1
Glauber's Salt	1	1	1	1	0
Glucose	1	1	1	1	1
Glue	1	2	1	1	3
Glycerin	1	2	1	1	1
Glycols	1	1	1	1	1
Green Sulfate Liquor	1	1	1	1	0
n-Hexaldehyde	1	1	1	1	1
Hexane	1	1	1	1	1
Hexene	1	1	1	1	1
Hexyl Alcohol	1	1	1	1	2
Hydraulic Oil Petroleum	1	1	1	1	1
Hydrochloric Acid, 15%	1	3	3	3	3
Hydrochloric Acid, 37%	1	3	3	3	3
Hydrocarbon Acid	1	3	1	1	1
Hydrofluoric Acid, Concentrated	1	3	3	3	3
Hydrofluosilicic Acid	1	0	3	3	3
Hydrogen, Gaseous	1	1	1	1	1
Hydrogen Peroxide, 70%	1	3	2	1	3
Hydrogen Sulfide, Gaseous	1	3	2	1	3
Hydroquinone	0	0	1	1	0
Isobutyl alcohol	1	1	1	1	2
Iso Octane	1	1	1	1	1
Isopropyl Acetate	1	1	1	1	1
Isopropyl Alcohol	1	1	1	1	2
Isopropyl Ether	1	1	1	1	1
Kerosene	1	1	1	1	1
Lacquers	1	3	3	1	1
Lacquers Solvent	1	3	3	1	1
Lactic Acid	1	3	2	1	2
Lard	1	1	1	1	3
Lead Acetate	1	2	1	1	1
Lead Nitrate	0	1	1	1	0
Lime Bleach	0	3	2	1	0
Linoleic Acid	1	0	0	0	0
Linseed Oil	1	2	1	1	2
Lubricating Oils, Petroleum	1	1	1	1	1
Magnesium Chloride	1	3	2	1	2
Magnesium Hydroxide	1	1	1	1	1
Magnesium Sulfate	1	2	1	1	1
Malic Acid	1	2	2	1	0
Mercuric Chloride	1	3	1	1	3
Mercury	1	1	1	1	3
Mesityl Oxide	1	1	1	1	1
Methyl Acetate	1	1	1	1	1
Methyl Acrylate	0	1	1	1	1
Methyl Alcohol Methanol	1	3	3	2	2
Methyl Bromide	1	1	1	1	1
Methyl Butyl Ketone	1	1	1	1	1

# CHEMICAL RESISTANCE CHART




**Material Compatibility Key : 1. Excellent 2. Acceptable 3. Not Recommended 0. No Information , Test Before Using**

Chemical	PTFE	CS	SS 321 SS 304	SS 316	BRASS
Methyl Chloride	1	1	1	1	1
Methylene Chloride	1	1	1	1	1
Methyl Ethyl Keton(Mek)	1	1	1	1	1
Methyl Formate	1	1	1	1	1
Methyl Isobutyl Keton	1	1	1	1	1
Methyl	1	1	1	1	0
Methyl	1	1	1	1	1
Milk	1	3	1	1	3
Mineral Oil	1	1	1	1	1
Monochlorobenzene	1	1	1	1	1
Monothanolamine	0	1	1	1	1
Naphtha	1	2	2	1	1
Napthalene	1	0	0	1	0
Napthenic Acid	1	0	0	1	0
Natural Gas	1	1	1	1	2
Nickel Acetate	1	1	1	1	1
Nickel Chloride	1	3	2	2	3
Nickel Sulfate Sulphate	1	0	2	1	3
Niter Cake	0	3	2	1	3
Nitric Acid, All Concentrations	1	3	2	2	0
Nitric Acid, Red Fuming	1	3	2	2	3
Nitrobenzene	1	1	1	1	1
Nitroethane	1	0	1	1	1
Nitrogen , Gaseous	1	1	1	1	1
Nitrogen Tetroxide	0	0	0	2	0
n-Octane	0	1	1	1	1
Octyl Alcohol	1	1	1	1	2
Oil, SAE	1	1	1	1	1
Oleic Acid	1	2	2	1	2
Olive Oil	1	2	2	1	2
Oxalic Acid	1	3	2	1	3
Oxygen, Gaseous	1	1	1	1	1
Ozone	1	1	1	1	1
Paint	1	0	1	1	1
Palmitic Acid	1	1	2	1	3
Peanut Oil	1	1	1	1	3
Perchloric Acid	1	0	2	1	1
Perchloroethylene	1	1	1	1	1
Petroleum	1	1	1	1	1
Phenol	1	3	1	1	3
Phorone	1	1	1	1	1
Picric Acid	1	3	1	1	3
Pinene	1	1	1	1	1
Pine Oil	1	1	1	1	0
Plating Solution, Chrome	1	0	3	3	0
Potassium Acetate	1	0	1	1	0
Potassium Chloride	1	3	2	1	3
Potassium Cyanide	1	2	1	1	3
Potassium Dichromate	1	0	1	1	0
Potassium Hydroxide,30%	1	3	1	1	3
Potassium Nitrate	1	3	1	1	2
Potassium Sulphate	1	2	1	1	2
Propane	1	1	1	1	1
Propyl Acetate	0	1	1	1	1
Propyl Alcohol	1	1	1	1	2
Pyridine , 50%	1	0	1	1	1
Red Oil	1	2	2	1	2
Salicylic Acid	0	0	1	1	0
Salt Water	1	2	1	1	3
Sewage	1	3	1	1	1
Silicone Greases	0	1	1	1	1

Chemical	PTFE	CS	SS 321 SS 304	SS 316	BRASS
Silicon Oils	0	1	1	1	1
Silver Nitrate	1	3	1	1	3
Skydrol 500 & 700	1	1	1	1	0
Soap Solutions	1	1	1	1	1
Soda Ash	0	1	1	1	2
Sodium Acetate	1	1	1	1	1
Sodium Bicarbonate	1	2	1	1	2
Sodium Bisulfite	1	1	1	1	0
Sodium Borate	1	1	1	1	0
Sodium Chloride	1	2	2	1	3
Sodium Cyanide	1	2	1	1	3
Sodium Hydroxide , 40%	1	2	1	1	3
Sodium Hypochlorite 5% still	1	3	3	2	3
Sodium Metaphosphate	1	3	1	1	3
Sodium Nitrate	1	1	1	1	0
Sodium Perborate	1	3	1	1	3
Sodium Peroxide	1	3	1	1	3
Sodium Phosphate	1	0	1	1	3
Sodium Thiosulphate	1	3	1	1	0
Soybean Oil	1	1	1	1	3
Stannic Chloride	1	3	0	0	3
Steam	1	0	2	1	2
Stearic Acid	1	3	2	1	3
Stoddard Solvent	1	2	1	1	1
Styrene	1	2	0	2	2
Sucrose Solution	1	1	1	1	0
Sulfur , 200°F	1	2	2	1	3
Sulfur Chloride	1	3	3	2	3
Sulfur Dioxide	1	2	1	1	1
Sulfur Trioxide	1	2	2	2	0
Sulfuric Acid ,10%	1	3	3	2	3
Sulfuric Acid , 98%	1	3	3	2	3
Sulfuric Acid, Fuming	1	2	0	1	3
Sulfurous Acid , 10%	1	3	2	1	3
Sulfurous Acid, 75%	1	3	3	2	3
Tannic Acid , 10%	1	3	1	1	0
Tar Bituminous	1	1	1	1	2
Tartaric Acid	1	0	2	2	0
Terpineol	1	0	0	0	0
Titanium Tetrachloride	0	1	2	2	3
Toluene	1	1	1	1	1
Toluene Disocyanate	0	0	0	0	0
Transformer Oil	1	1	1	1	1
Transmission Fluid Type A	1	1	1	1	1
Tributoxyethyl Phosphate	1	1	0	0	0
Tributyl Phosphate	1	1	0	0	0
Trichlorethylene	1	3	0	1	1
Tricresyl Phosphate	1	1	0	2	0
Tung Oil	1	1	1	1	1
Turpentine	1	0	1	1	2
Urea Solution , 50%	1	1	1	1	0
Varnish	0	2	1	1	2
Vegetable Oil	1	1	1	1	0
Versilube	1	1	1	1	1
Vinegar	1	3	2	1	3
Vinyl Chloride	1	2	1	1	3
Water	1	2	1	1	1
Whiskey, Wines	1	3	2	1	3
Xylene	1	2	2	2	0
Zinc Acetate	1	1	1	1	1
Zinc Chloride	1	3	2	1	3
Zinc Sulfate / Sulphate	1	3	2	1	3

## Industries We Serve



---

Office : 803 8th Floor, Sethna Mansion, 10th Khetwadi Back Road, Mumbai - 400 004.

---

**Tel.:** +91 22 6638 1377 **Email :** [info@omaa.co.in](mailto:info@omaa.co.in) **Web.:** [www.oomaa.co.in](http://www.oomaa.co.in)